1335 AMAZE 30' THRIVE 30' x 65'

	REVISION SCHEDULE					
NO.	DATE	DESCRIPTION	BY			
Λ	Ø3-3Ø-23	-RE-DESIGN MASTER BATH & WALK IN CLOSET	RN			
	W5-5W-25	-RECESS CANS ILO LIGHT FIXTURES	N.			
3	Ø3-3Ø-23	-ADD (2) PENDANT LTS PREWIRE OVER	МШ			
/2	09-30-23	KITCHEN ISLAND	1 100			

SHEET	INDEX:
00	COVER SHEET
01.0	FOUNDATION PLAN A,B,C
01.1	FOUNDATION PLAN A,B,C- LANAI
02.0	FLOOR PLAN W/ DIMENSIONS A,B,C
02.1	FLOOR PLAN W/ DIMENSIONS A,B,C- LANAI
03.0	FLOOR PLAN W/ NOTES A,B,C
03.1	FLOOR PLAN W/ NOTES A,B,C- LANAI
04A.0	EXTERIOR ELEVS FRONT/ REAR "A"
04A.1	EXTERIOR ELEVS FRONT/ REAR "A"- LANAI
	EXTERIOR ELEVS LEFT/ RIGHT "A"
05A.1	EXTERIOR ELEVS LEFT/ RIGHT "A"- LANAI
06	CROSS SECTION AND INTERIOR ELEVATIONS
07.0	ELECTRICAL PLAN A,B,C
07.1	ELECTRICAL PLAN A,B,C- LANAI
0.A80	TRUSS LAYOUT "A"
08A.1	TRUSS LAYOUT "A"- LANAI
09.0	PRECAST LINTEL LAYOUT A,B,C
09.1	PRECAST LINTEL LAYOUT A,B,C- LANAI
10	TYPICAL DETAILS
11	TYPICAL DETAILS/CONNECTOR SCHEDULE
D1	TYPICAL STRUCTURAL DETAILS
D2	TYPICAL STRUCTURAL DETAILS
D3	TYPICAL STRUCTURAL DETAILS
D4	NOT USED
D5	TYPICAL STRUCTURAL DETAILS
D6	TYPICAL STRUCTURAL DETAILS
D7	TYPICAL STRUCTURAL DETAILS

SHEET	INDEX:
00	COVER SHEET
01.0	FOUNDATION PLAN A,B,C
01.1	FOUNDATION PLAN A,B,C- LANAI
02.0	FLOOR PLAN W/ DIMENSIONS A,B,C
02.1	FLOOR PLAN W/ DIMENSIONS A,B,C- LANAI
03.0	FLOOR PLAN W/ NOTES A,B,C
03.1	FLOOR PLAN W/ NOTES A,B,C- LANAI
04B.0	EXTERIOR ELEVS FRONT/ REAR "B"
04B.1	EXTERIOR ELEVS FRONT/ REAR "B"- LANAI
05B.0	EXTERIOR ELEVS LEFT/ RIGHT "B"
05B.1	EXTERIOR ELEVS LEFT/ RIGHT "B"- LANAI
	CROSS SECTION AND INTERIOR ELEVATIONS
07.0	ELECTRICAL PLAN A,B,C
	ELECTRICAL PLAN A,B,C- LANAI
	TRUSS LAYOUT "B"
08B.1	TRUSS LAYOUT "B"- LANAI
09.0	PRECAST LINTEL LAYOUT A,B,C
09.1	PRECAST LINTEL LAYOUT A,B,C- LANAI
	TYPICAL DETAILS
11	TYPICAL DETAILS/CONNECTOR SCHEDULE
D1	TYPICAL STRUCTURAL DETAILS
D2	TYPICAL STRUCTURAL DETAILS
D3	TYPICAL STRUCTURAL DETAILS
D4	NOT USED
D5	TYPICAL STRUCTURAL DETAILS
D6	TYPICAL STRUCTURAL DETAILS
D7	TYPICAL STRUCTURAL DETAILS


SHEET	INDEX:
00	COVER SHEET
01.0	FOUNDATION PLAN A,B,C
01.1	FOUNDATION PLAN A,B,C- LANAI
02.0	FLOOR PLAN W/ DIMENSIONS A,B,C
02.1	FLOOR PLAN W/ DIMENSIONS A,B,C- LANAI
03.0	FLOOR PLAN W/ NOTES A,B,C
03.1	FLOOR PLAN W/ NOTES A,B,C- LANAI
04C.0	EXTERIOR ELEVS FRONT/ REAR "C"
04C.1	EXTERIOR ELEVS FRONT/ REAR "C"- LANAI
05C.0	EXTERIOR ELEVS LEFT/ RIGHT "C"
05C.1	EXTERIOR ELEVS LEFT/ RIGHT "C"- LANAI
06	CROSS SECTION AND INTERIOR ELEVATIONS
07.0	ELECTRICAL PLAN A,B,C
07.1	ELECTRICAL PLAN A,B,C- LANAI
08C.0	TRUSS LAYOUT "C"
08C.1	TRUSS LAYOUT "C"- LANAI
09.0	PRECAST LINTEL LAYOUT A,B,C
09.1	PRECAST LINTEL LAYOUT A,B,C- LANAI
10	TYPICAL DETAILS
11	TYPICAL DETAILS/CONNECTOR SCHEDULE
D1	TYPICAL STRUCTURAL DETAILS
D2	TYPICAL STRUCTURAL DETAILS
	TYPICAL STRUCTURAL DETAILS
D4	NOT USED
	TYPICAL STRUCTURAL DETAILS
	TYPICAL STRUCTURAL DETAILS
D7	TYPICAL STRUCTURAL DETAILS

THRIVE SERIES

DATE 06-01-22

SCALE AS NOTED

OO SHEETS

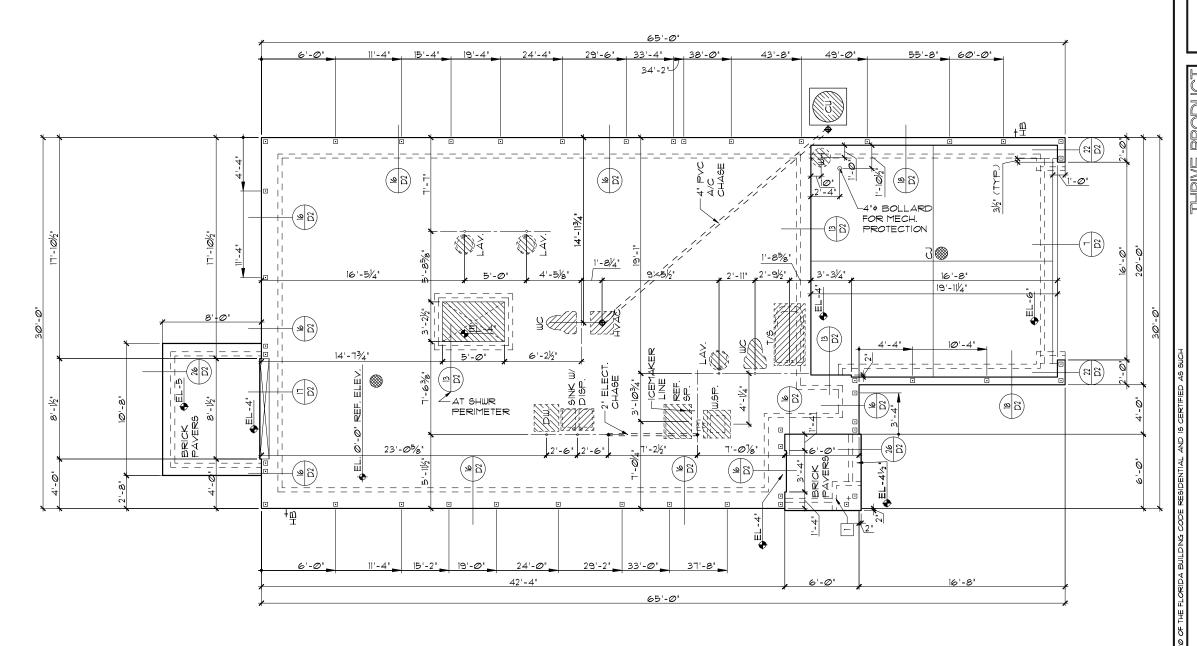


FOUNDATION NOTES

- 1. CONTRACTOR TO VERIFY ALL DIMENSIONS ON JOB SITE.
- 2. DENOTES FILLED CELL REINFORCED W/CONC. 4 (1) *5+ REBAR, GRADE 60
- 3. DENOTES FILLED CELL REINFORCED W/CONC. 4 (2) #5+ REBAR, GRADE 60
- 4.DO NOT SCALE PRINTS! CONSTRUCTION TO BE FROM CALCULATED DIMENSIONS ONLY. ANY AND ALL DISCREPANCIES OR ERRORS TO BE REPORTED PROMPTLY TO SUPERVISOR FOR CLARIFICATION
- 5. WATER HEATER T & PRELIEF VALVE SHALL BE FULL SIZE TO EXTERIOR. WATER HEATER AT OR ABOVE FLOOR LEVEL SHALL BE IN A PAN W/ DRAIN TO EXTERIOR. WATER HEATER SHALL HAVE APPROVED THERMAL EXPANSION DEVICE
- 6. DENOTES FLOOR SLAB OF PLANT MIX
 CONCRETE 2500 P.S.I., 3½" THICK W/
 6×6 10/10 GAUGE REINFORCING MAT. W/
 MINIMUM 1" COVER. TERMITE TREATED SOIL
 W/ 006mm (6 mil) POLYETHYLENE VAPOR
 BARRIER OVER COMPACTED CLEAN FILL.
 WUF SHALL BE PLACED IN THE MIDDLE TO
 UPPER 1/3 OF THE SLAB AND SUPPORTED
 BY APPROVED SLAB BOLSTERS.
 "*NOTE: FIBERMESH REINFORCEMENT MAY
 BE USED AS AN ALTERNATE TO WIRE
 MESH
- 1. PAVERS MAY BE USED ILO CONCRETE IN PATIO, PORCH, DRIVEWAYS AND WALKWAYS. DELETE SLAB IN AREAS PAVERS ARE USED.
- 8.MECHANICAL EQUIPMENT LOCATIONS WILL BE DETERMINED BY COMMUNITY AND COUNTY CODES.
- 9.IN LIEU OF TERMITE TREATING THE SOIL, TERMICIDE MAY BE USED AS AN ALTERNATIVE.

FOUNDATION PLAN A,B,C

1/8"=1'-@" (11×17) 1/4"=1'-@" (22×34)

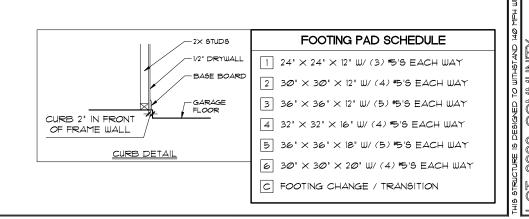

Degrights in these plans, ideas, and design. These plans, ideas and designs are not to be copied assigned to any third party without first obtaining the express written permission from RDC, INC.

A DINSION OF PARK SOUARE

Braine C. INC.

A DINSION OF PARK SOUARE

Braine C. INC.

Braine C. INC.

A DINSION OF PARK SOUARE

Braine C. INC.

A DINSION OF PARK SOUARE

Braine C. INC.

DATION PLAN


HOMES

HOMES

PHONE 407-721-2292

DATE 06-01-22
CO SCALE AS NOTED
DRAWN RDC
JOB 1335

DRAWN RI
JOB 12
SHEET
SHEET

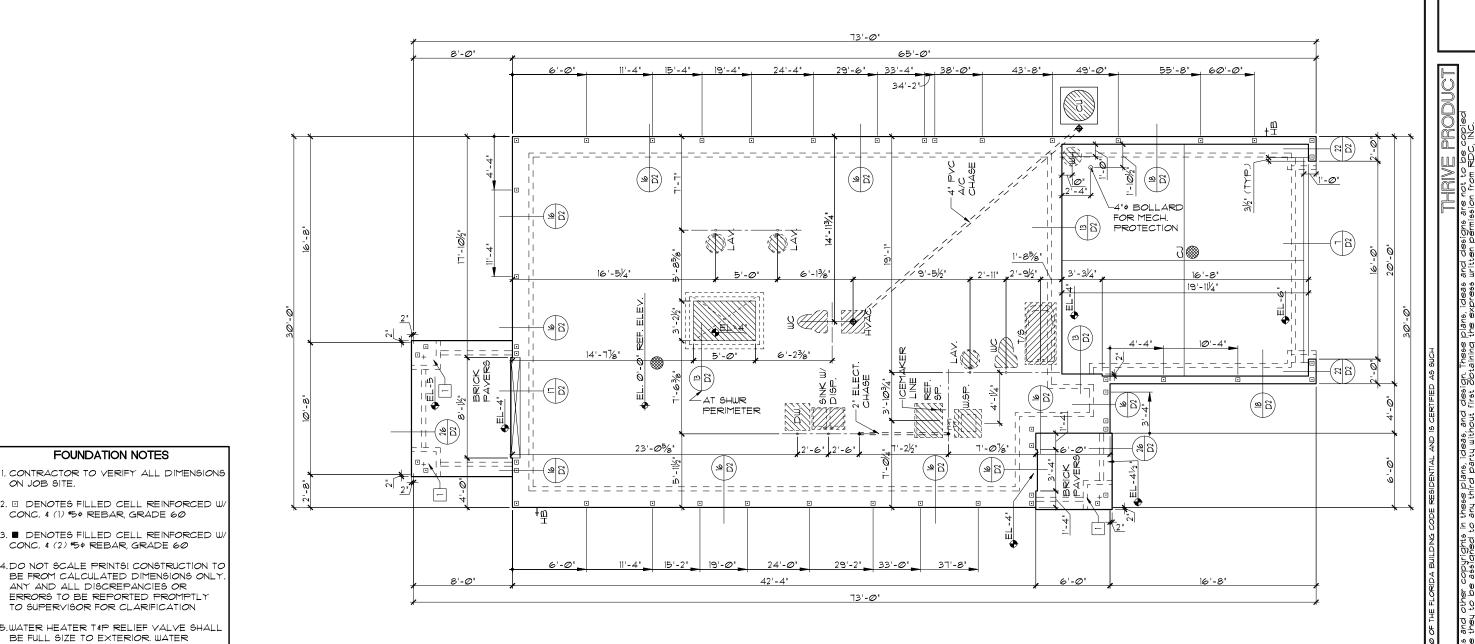


FOUNDATION NOTES

- . CONTRACTOR TO VERIFY ALL DIMENSIONS ON JOB SITE.
- CONC. 4 (1) #50 REBAR, GRADE 60
- 3. DENOTES FILLED CELL REINFORCED WA CONC. 4 (2) *50 REBAR, GRADE 60
- 4.DO NOT SCALE PRINTS! CONSTRUCTION TO BE FROM CALCULATED DIMENSIONS ONLY. ANY AND ALL DISCREPANCIES OR FRRORS TO BE REPORTED PROMPTLY TO SUPERVISOR FOR CLARIFICATION
- 5.WATER HEATER T&P RELIEF VALVE SHALL BE FULL SIZE TO EXTERIOR, WATER HEATER AT OR ABOVE FLOOR LEVEL SHALL BE IN A PAN W/ DRAIN TO EXTERIOR WATER HEATER SHALL HAVE APPROVED THERMAL EXPANSION DEVICE
- DENOTES FLOOR SLAB OF PLANT MIX CONCRETE 2500 P.S.I., 31/2" THICK W/ 6X6 10/10 GAUGE REINFORCING MAT. W/ MINIMUM I" COVER. TERMITE TREATED SOIL W/.006mm (6 mil) POLYETHYLENE VAPOR BARRIER OVER COMPACTED CLEAN FILL. WWF SHALL BE PLACED IN THE MIDDLE TO UPPER 1/3 OF THE SLAB AND SUPPORTED BY APPROVED SLAB BOLSTERS. ***NOTE: FIBERMESH REINFORCEMENT MAY BE USED AS AN ALTERNATE TO WIRE
- PAVERS MAY BE USED ILO CONCRETE IN PATIO, PORCH, DRIVEWAYS AND WALKWAYS. DELETE SLAB IN AREAS PAVERS ARE USED.
- 8.MECHANICAL EQUIPMENT LOCATIONS WILL BE DETERMINED BY COMMUNITY AND COUNTY CODES.
- 9.IN LIEU OF TERMITE TREATING THE SOIL, TERMICIDE MAY BE USED AS AN ALTERNATIVE.



1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)

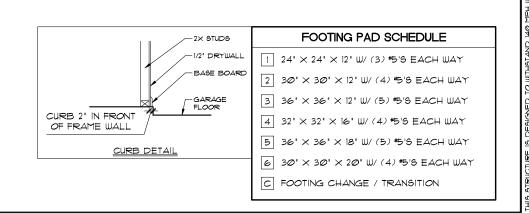


SERIES

AMAZE

[332

SCALE AS NOTED

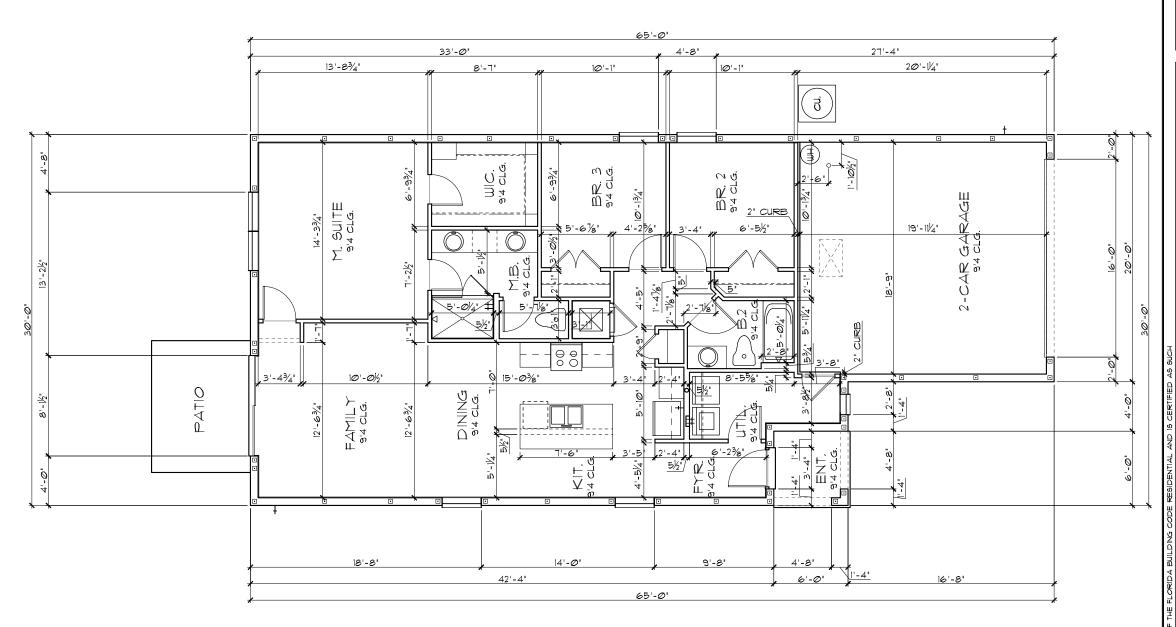


GENERAL NOTES

- 1. CONTRACTOR TO VERIFY ALL DIMENSIONS ON JOB SITE.
- 2. DO NOT SCALE PRINTS! CONSTRUCTION
 TO BE FROM CALCULATED DIMENSIONS
 ONLY, ANY DISCREPANCIES OR ERRORS
 TO BE REPORTED PROMPTLY TO
 SUPERVISOR FOR CLARIFICATION.
- 3. ALL INTERIOR FRAME WALL DIMENSIONS TO BE $3\frac{1}{2}$ " UNLESS NOTED OTHERWISE.
- 4. ALL EXTERIOR BLOCK WALL DIMENSIONS TO BE 71/2" UNLESS NOTED OTHERWISE.
- 5. ALL INTERIOR CEILINGS AT 9'-4" UNLESS NOTED OTHERWISE.
- 6. MECHANICAL EQUIPMENT LOCATIONS
 WILL BE DETERMINED BY COMMUNITY
 AND COUNTY CODES.

FLOOR PLAN W/ DIMENSIONS A,B,C,

1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)

DIMENSIONS PLAN W/ THRIVE SERIES AMAZE DATE **06-0**1-22 SCALE AS NOTED

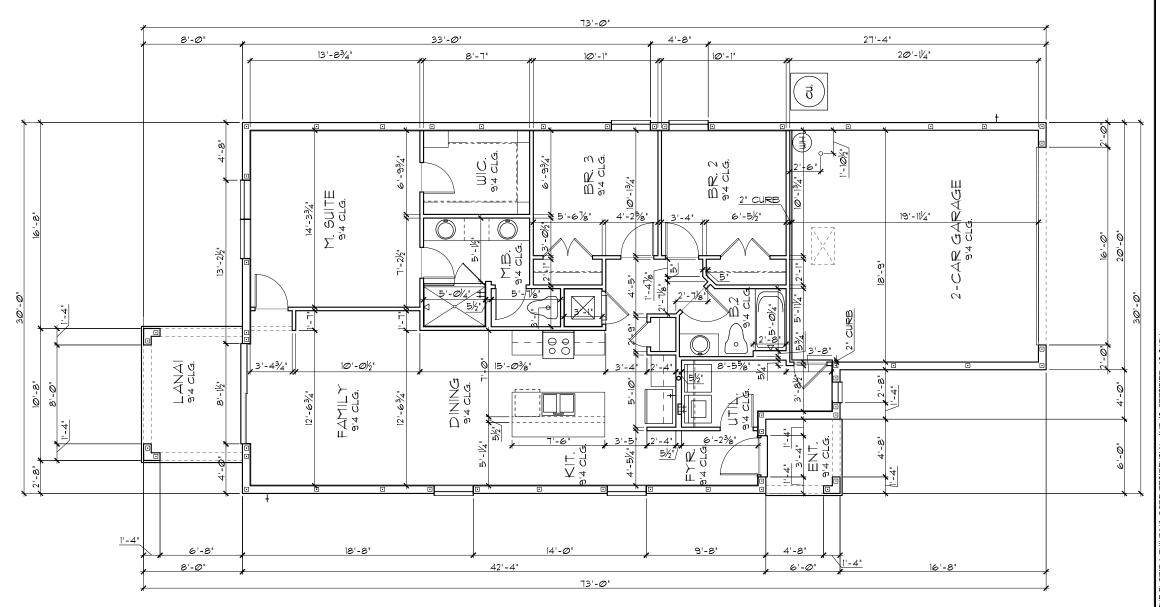

GENERAL NOTES

- 1. CONTRACTOR TO VERIFY ALL DIMENSIONS ON JOB SITE.
- 2. DO NOT SCALE PRINTS! CONSTRUCTION TO BE FROM CALCULATED DIMENSIONS ONLY. ANY DISCREPANCIES OR ERRORS TO BE REPORTED PROMPTLY TO SUPERVISOR FOR CLARIFICATION.
- 3. ALL INTERIOR FRAME WALL DIMENSIONS TO BE $3\frac{1}{2}$ " UNLESS NOTED OTHERWISE.
- 4. ALL EXTERIOR BLOCK WALL DIMENSIONS TO BE $1\frac{1}{2}$ unless noted otherwise.
- 5. ALL INTERIOR CEILINGS AT <u>9'-4'</u> UNLESS NOTED OTHERWISE.
- 6. MECHANICAL EQUIPMENT LOCATIONS
 WILL BE DETERMINED BY COMMUNITY
 AND COUNTY CODES.

FLOOR PLAN W/ DIMENSIONS A,B,C,

1/8"=|'-Ø" (||X|7) |/4"=|'-Ø" (22×34)

DIMENSIONS PLAN W/ THRIVE SERIES AMAZE DATE **06-0**1-22 SCALE AS NOTED

LOAD INFORMATION PER 1TH EDITION, 2020 FLORIDA BUILDING RESIDENTIAL CODE DEAD LOADS FLOOR: STRUCTURE ----- 7 PSF CEILINGS ----- 3 PSF MECH/ELEC ----- 5 PSF PARTITIONS ----- 5 PSF ROOF: SHEATHING ----- 5 PSF STRUCTURE ----- 1 PSF CEILINGS ----- 3 PSF MECH/ELEC ----- 5 PSF TOTAL -----20 PSF FLOOR LIVE LOADS RESIDENTIAL FLOOR: -----40 PSF STAIR LIVE LOAD: -----40 PSF ROOF LIVE LOADS MINIMUM ROOF LIVE LOAD (PSF) TRIBUTARY LOADED AREA (SQ. FT.) FOR ANY STRUCTURAL MEMBER ROOF SLOPE 0-200 201-600 OVER 600 Ø:12 < 4:12 20 > 4:12 < 12:12 > 12:12

WIND INFORMATION PER 1TH EDITION, 2020 FLORIDA BUILDING RESIDENTIAL CODE BASIC WIND SPEED: -----I40 MPH WIND IMPORTANCE FACTOR:----N/A 3. BUILDING CATEGORY: ----- B 4. INTERNAL PRESSURE---- +/-.18, INCLUDED COEFFICIENT: IN NOTE #5 . COMPONENT / CLADDING ---- SEE PLAN DESIGN WIND PRESSURE: + XXX DESIGN WIND PRESSURE IAW FLA - XXX RESIDENTIAL CODE, SECTION R3Ø1 NOTE: DESIGN PRESSURES BASED ON BASIC WIND SPEED AND NOT ULTIMATE

GENERAL NOTES

- PROVIDE RECESS HOT & COLD WATER WITH DRAIN @ WASHER SPACE.
- YENT DRYER THRU EXTERIOR WALL.
- PROVIDE COLD WATER LINE FOR ICE MAKER LINE @ REF. SPACE.

WIND SPEED

- DO NOT SCALE PRINTS! CONSTRUCTION TO BE FROM CALCULATED DIMENSIONS ONLY. ANY DISCREPANCIES OR ERRORS TO BE REPORTED PROMPTLY TO SUPERVISOR FOR CLARIFICATION.
- MECHANICAL EQUIPMENT LOCATION TO BE DETERMINED BY COMMUNITY STANDARDS AND APPLICABLE COUNTY CODES.

DENOTES CONC. BLOCK WALL HGT. @ **9'-4" A.F.F.**

DENOTES CONC. BLOCK WALL HGT. @ N/A

SHOWER - SLOPE FLOOR

URB -

RECESSED


HOWER - SLOPE

INISH FLOOR

SECTION

DENOTES CONC. BLOCK WALL HGT. @ N/A

- REFER TO TYPICAL DETAIL SHEET FOR EXTERIOR WALL FINISH SPECIFICATIONS
- REFER TO DETAIL SHEETS FOR FLASHING REQUIREMENTS AT ALL WOOD TO MASONRY INTERFACES
- ANCHOR THE CONDENSER UNIT TO SLAB PER CODE: M 307.3 + 1307.3.1
- Ø. ALL INTER. FIRST FLOOR CEILINGS AT 9'-4' UNLESS NOTED OTHERWISE.

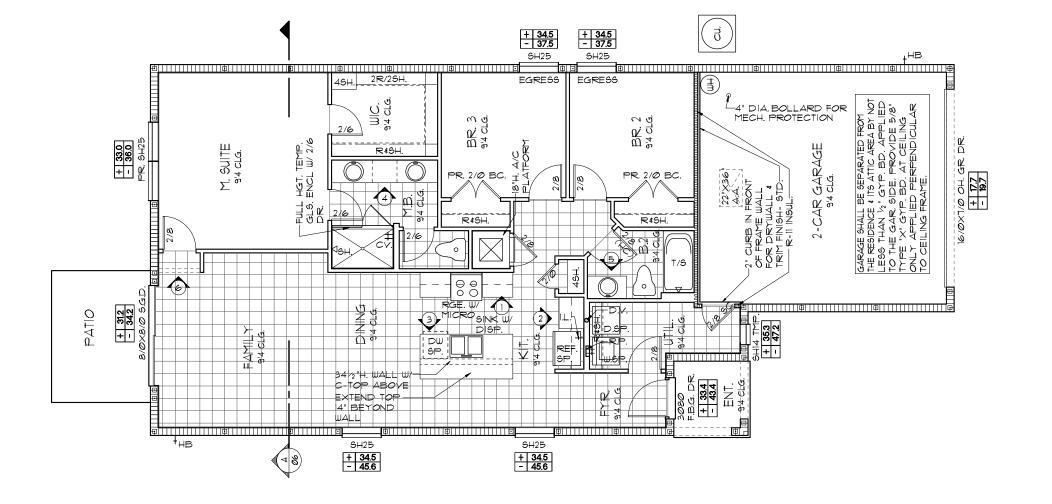



FLOOR PLAN W/ NOTES ABC

NOTE: ALL INTERIOR DOORS ON THIS FLOOR TO BE: **6'-8"** UN.O. -VERIFY WITH COLOR SHEET.

JOB

SERIES AMAZE THRIVE [332

DATE Ø6-Ø1-22

SCALE AS NOTED RAWN 1335

SHEETS

LOAD INFORMATION PER 1TH EDITION, 2020 FLORIDA BUILDING RESIDENTIAL CODE DEAD LOADS FLOOR: STRUCTURE ----- 1 PSF CEILINGS ----- 3 PSF MECH/ELEC ----- 5 PSF PARTITIONS ----- 5 PSF ROOF: SHEATHING ----- 5 PSF STRUCTURE ----- 1 PSF CEILINGS MECH/ELEC ----- 5 PSF TOTAL FLOOR LIVE LOADS RESIDENTIAL FLOOR: -----40 PSF STAIR LIVE LOAD: -----40 PSF MINIMUM ROOF LIVE LOAD (PSF) TRIBUTARY LOADED AREA (SQ. FT.) FOR ANY STRUCTURAL MEMBER ROOF SLOPE 0-200 201-600 OVER 600 Ø:12 < 4:12 20 > 4:12 < 12:12 > 12:12

WIND INFORMATION PER 1TH EDITION, 2020 FLORIDA BUILDING RESIDENTIAL CODE BASIC WIND SPEED: -----140 MPH WIND IMPORTANCE FACTOR:----N/A 3. BUILDING CATEGORY: ----- B 4. INTERNAL PRESSURE---- +/-.18, INCLUDED COEFFICIENT: IN NOTE #5 . COMPONENT / CLADDING - - - - SEE PLAN DESIGN WIND PRESSURE: + XXX DESIGN WIND PRESSURE IAW FLA - XXX RESIDENTIAL CODE, SECTION R301 NOTE: DESIGN PRESSURES BASED ON BASIC WIND SPEED AND NOT ULTIMATE

GENERAL NOTES

- PROVIDE RECESS HOT & COLD WATER WITH DRAIN @ WASHER SPACE.
- VENT DRYER THRU EXTERIOR WALL.
- PROVIDE COLD WATER LINE FOR ICE MAKER LINE @ REF. SPACE.

WIND SPEED.


- DO NOT SCALE PRINTS! CONSTRUCTION TO BE FROM CALCULATED DIMENSIONS ONLY. ANY DISCREPANCIES OR ERRORS TO BE REPORTED PROMPTLY TO SUPERVISOR FOR CLARIFICATION.
- MECHANICAL EQUIPMENT LOCATION TO BE DETERMINED BY COMMUNITY STANDARDS AND APPLICABLE COUNTY CODES.

DENOTES CONC. BLOCK WALL HGT. @ **9'-4" A.F.F.**

DENOTES CONC. BLOCK WALL HGT. @ N/A


DENOTES CONC. BLOCK WALL HGT. @ N/A

- REFER TO TYPICAL DETAIL SHEET FOR EXTERIOR WALL FINISH SPECIFICATIONS
- REFER TO DETAIL SHEETS FOR FLASHING REQUIREMENTS AT ALL WOOD TO MASONRY INTERFACES
- ANCHOR THE CONDENSER UNIT TO SLAB PER CODE: M 307.3 + 1307.3.1
- 0. ALL INTER. FIRST FLOOR CEILINGS AT 9'-4' UNLESS NOTED OTHERWISE.

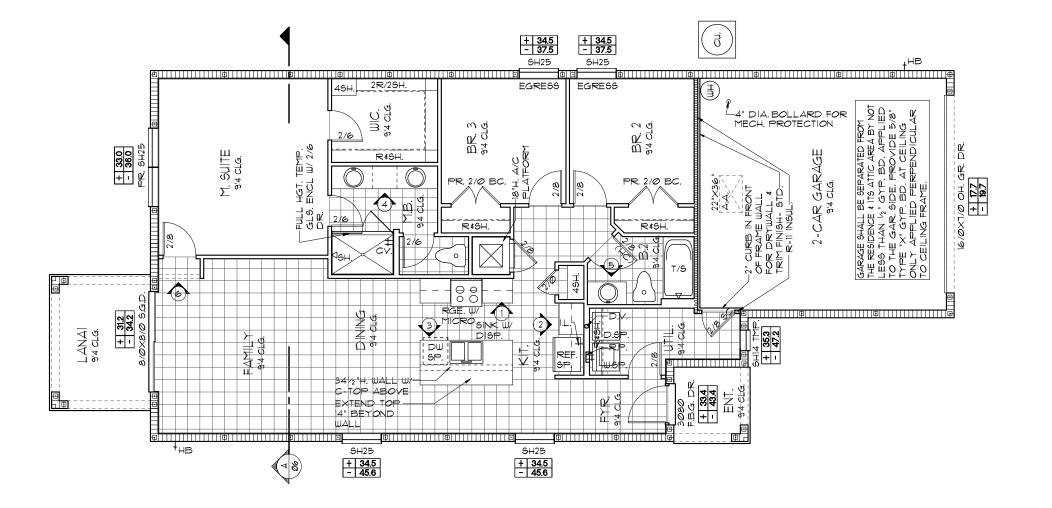

FLOOR PLAN W/ NOTES A.B.C.

1/8"=1'-0" (11×17) 1/4"=1'-0" (22×34)

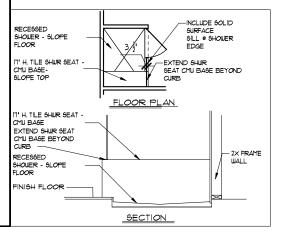

NOTE: ALL INTERIOR DOORS ON THIS FLOOR TO BE: **6'-8"** UN.O. -VERIFY WITH COLOR SHEET.

SERIES


AMAZE 1335

THRIVE

DATE Ø6-Ø1-22 SCALE AS NOTED

- LATH TO BE ATTACHED IAW RT@3.7.1 OF THE 1TH EDITION, FBCR. 2020
- PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES : ASTM C926 \$
- . WEEP SCREED TO BE INSTALLED IAW R703.7.2.1 OF THE 7TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW RT03.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



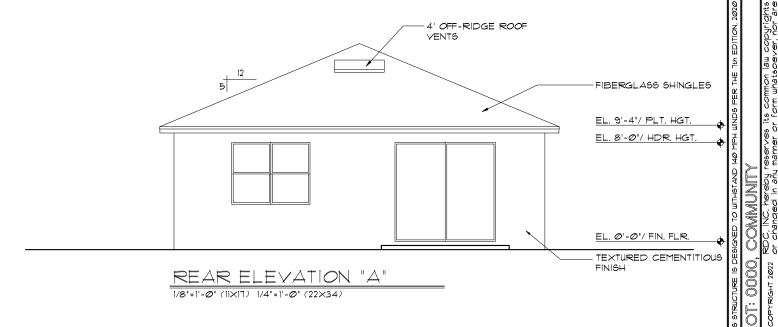


OR ELEVATION - AND REAR EXTERIOR [

THRIVE SERIES 1335 AMAZE

SCALE AS NOTED

- LATH TO BE ATTACHED IAW RT@3.7.1 OF THE 1TH EDITION, FBCR. 2020
- PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES : ASTM C926 \$
- 3. WEEP SCREED TO BE INSTALLED IAW R103.12.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



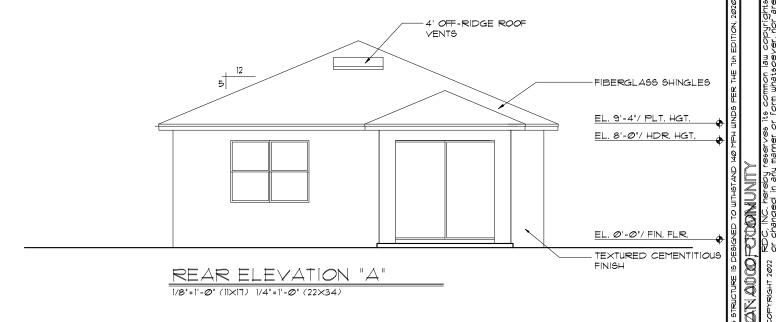

EVATION O REAR


EXTERIOR [

THRIVE SERIES 1335 AMAZE

SCALE AS NOTED

- 1. LATH TO BE ATTACHED IAW R703.7.1 OF THE 1TH EDITION, FBCR. 2020
- 2. PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES: A6TM C926 & CIO6B
- 3. WEEP SCREED TO BE INSTALLED IAW R103.12.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



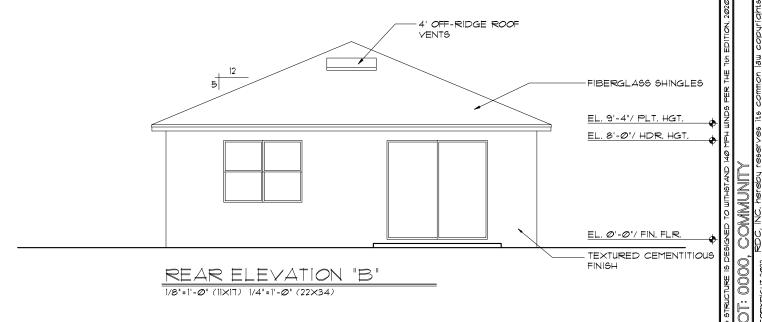

REVISIONS BY

Engineering By:
DBE and C
MICHAEL A THOMPSON
PE 47509
PHONE 407-721-2292

OF PARK SOUARE ENG ES, INC. Ind Road, Suite 200 MICHAE orida 32811 PHONE 7) 529 - 3000 PHONE

A DIVISION OF PARK E

STATE STATE STATE

STATE OF PRICE STATE

OF STATE STATE

OF STATE STATE

OF STATE STATE

OF ST

EVATION Sq

EXTERIOR ELEVA: FRONT AND RE

1335 AMAZE THRIVE SERIES

DATE 06-01-22 SCALE AS NOTED

SCALE AS NOTED


DRAWN RDC

JOB 1335

JOB SHEET

- LATH TO BE ATTACHED IAW RTØ3.7.1 OF THE 1TH EDITION, FBCR. 2020
- PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES : ASTM C926 \$
- . WEEP SCREED TO BE INSTALLED IAW R703.7.2.1 OF THE 7TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



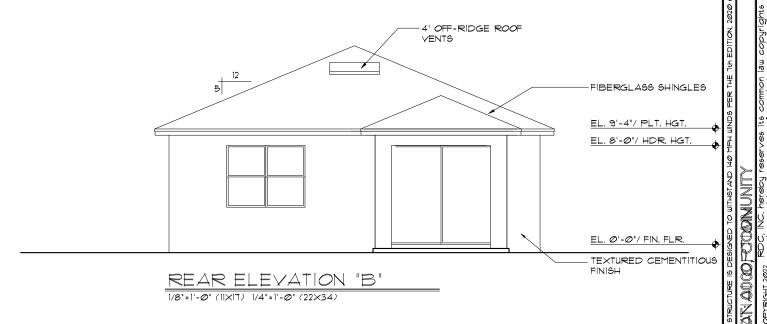

EVATION O REAR EXTERIOR [


1335 AMAZE

THRIVE SERIES

DATE **06-0**1-22 SCALE AS NOTED

- LATH TO BE ATTACHED IAW RTØ3.7.1 OF THE 1TH EDITION, FBCR. 2020
- PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES : ASTM C926 \$
- 3. WEEP SCREED TO BE INSTALLED IAW R103.12.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



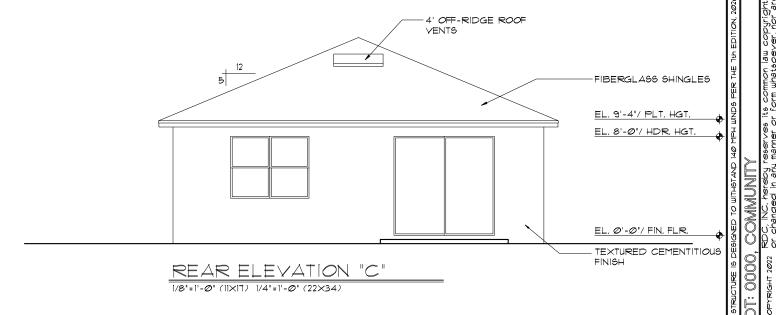

A DIVISION OF PARK SOUARE ENTERPRISES, INC. 5200 Vineland Road, Suite 200 Orlando, Florida 32311 Phone: (407) 529 - 3000

EVATION O REAR AND EXTERIOR [FRONT A


THRIVE SERIES

1335 AMAZE

DATE **06-0**1-22 SCALE AS NOTED

- LATH TO BE ATTACHED IAW RTØ3.7.1 OF THE 1TH EDITION, FBCR. 2020
- PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW RT03.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES : ASTM C926 \$
- . WEEP SCREED TO BE INSTALLED IAW R703.7.2.1 OF THE 7TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.



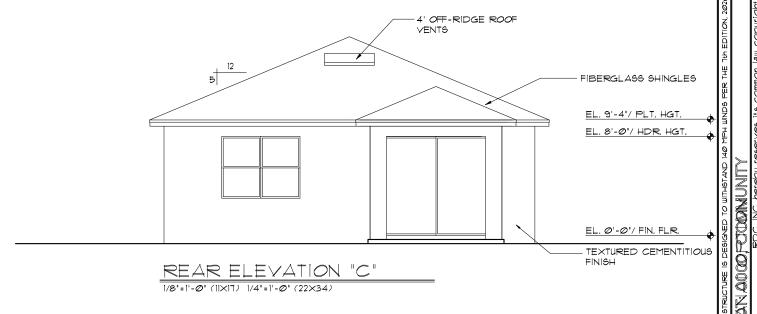

A DIVISION OF PARK SOUARE ENTERPRISES, INC. 5200 Vineland Road, Suite 200 Orlando, Florida 32311 Phone: (407) 529 - 3000

ELEVATION AND REAR AND


EXTERIOR [FRONT A


THRIVE SERIES 1335 AMAZE

DATE **06-0**1-22


SCALE AS NOTED 1335


- . LATH TO BE ATTACHED IAW R703.7.1 OF THE 1TH EDITION, FBCR. 2020
- 2. PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW R103.1.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES: ASTM C926 & CIOSB
- 3. WEEP SCREED TO BE INSTALLED IAW R103.1.2.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.

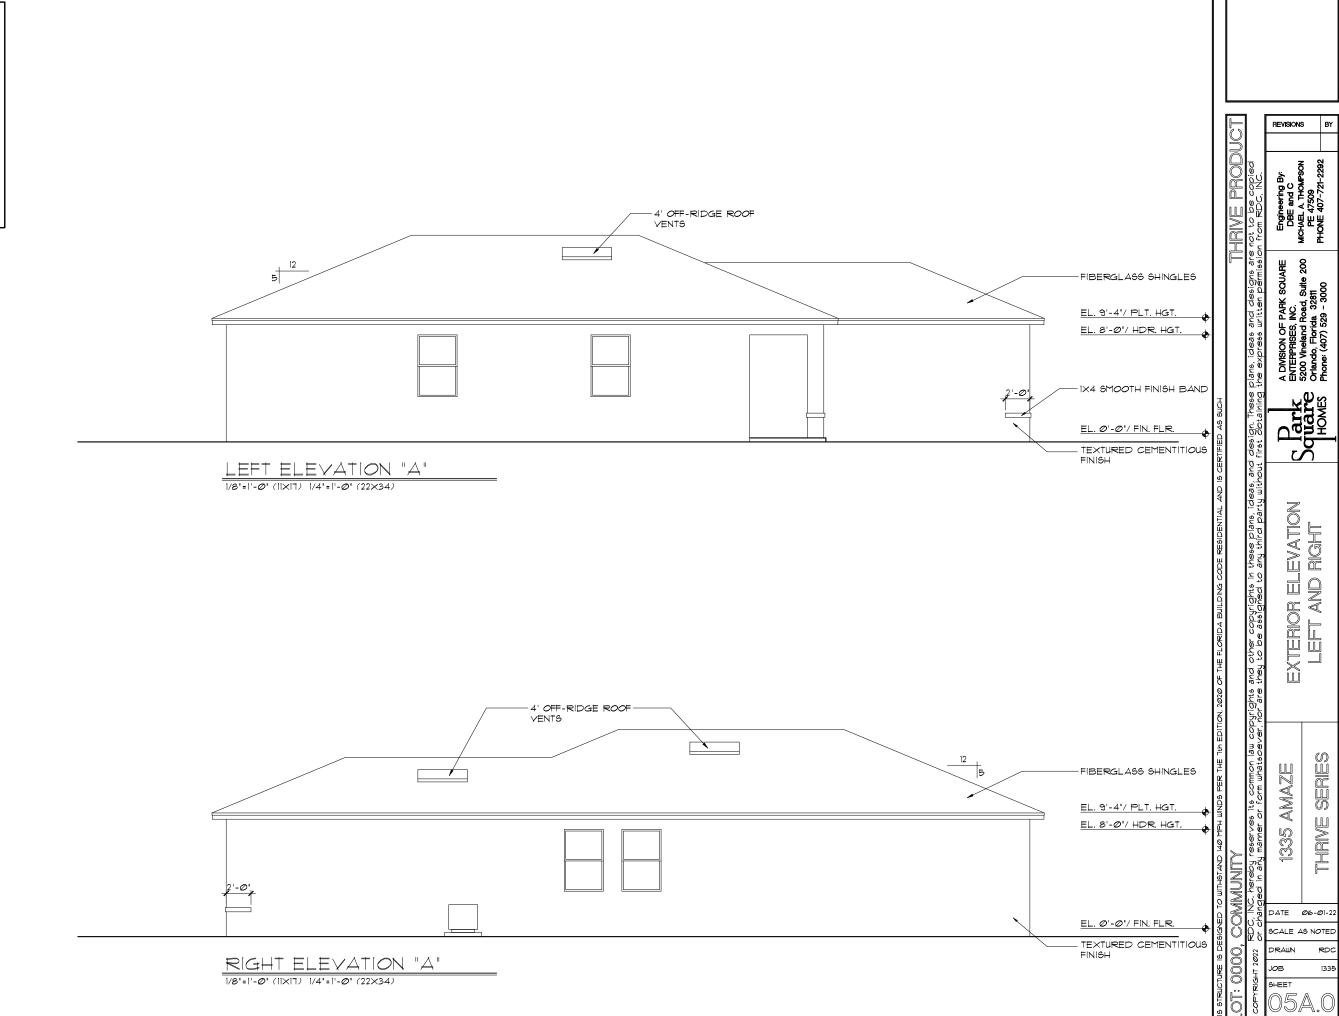

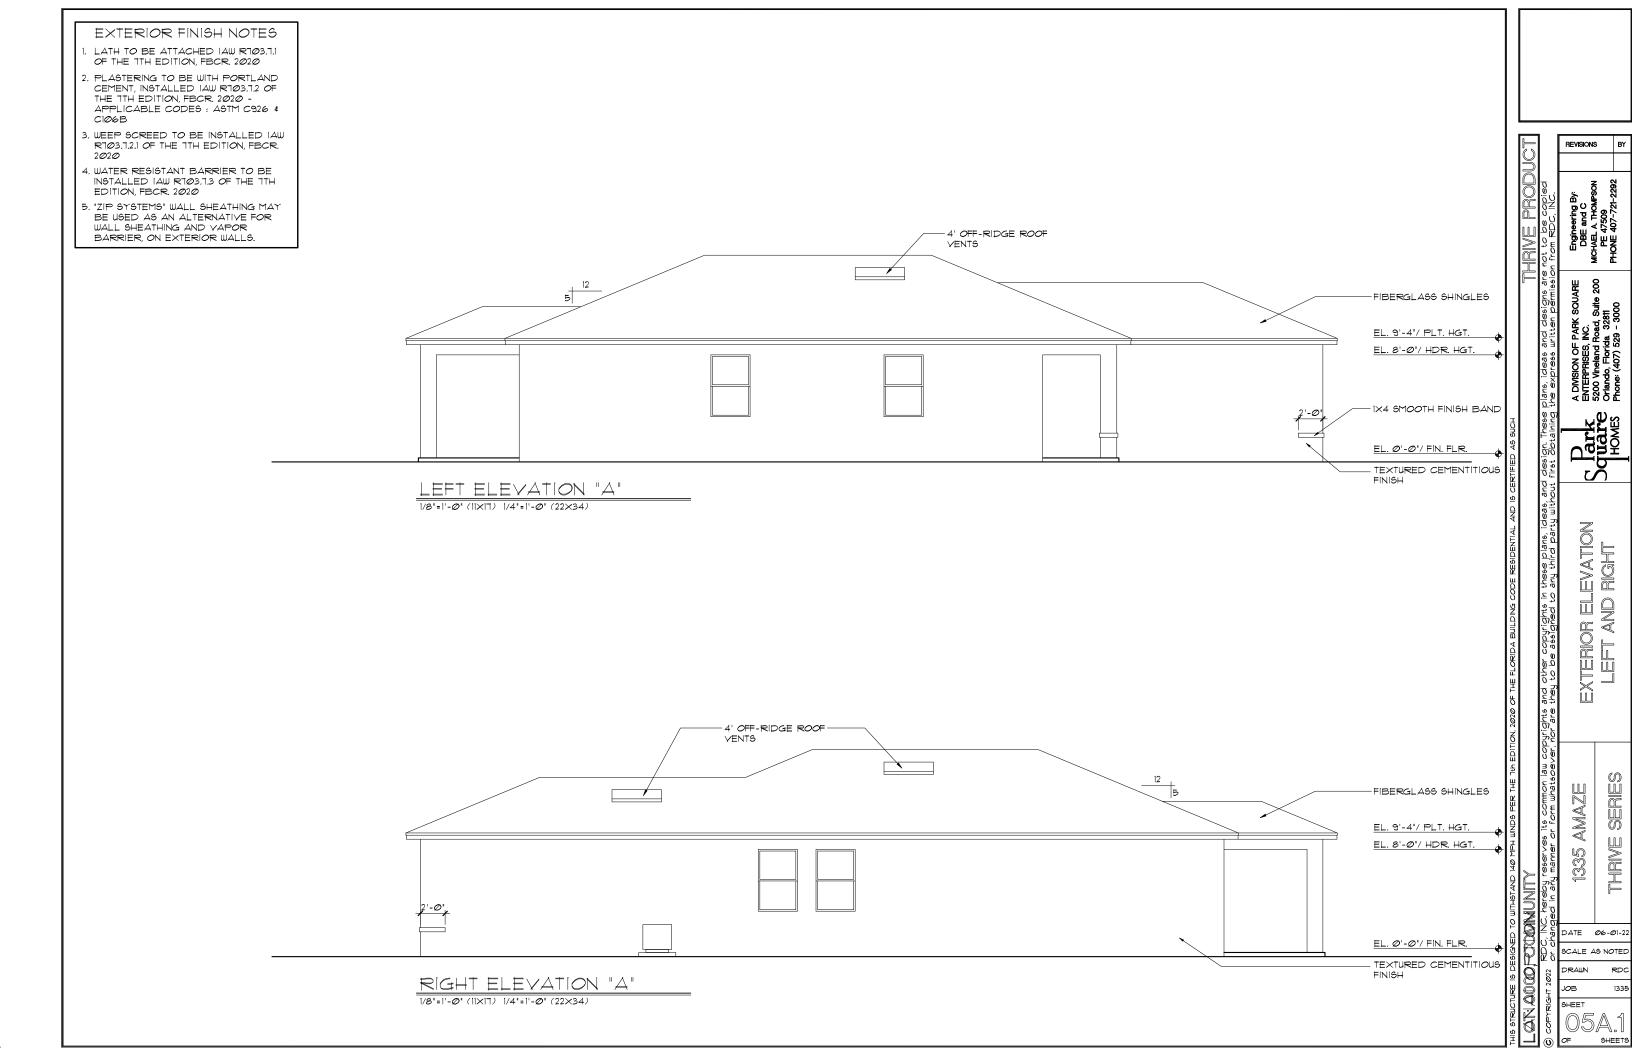



- . LATH TO BE ATTACHED IAW R703.7.1 OF THE 1TH EDITION, FBCR. 2020
- 2. PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW R703.7.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES: ASTM C926 & CIOSB
- 3. WEEP SCREED TO BE INSTALLED IAW R103.1.2.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.

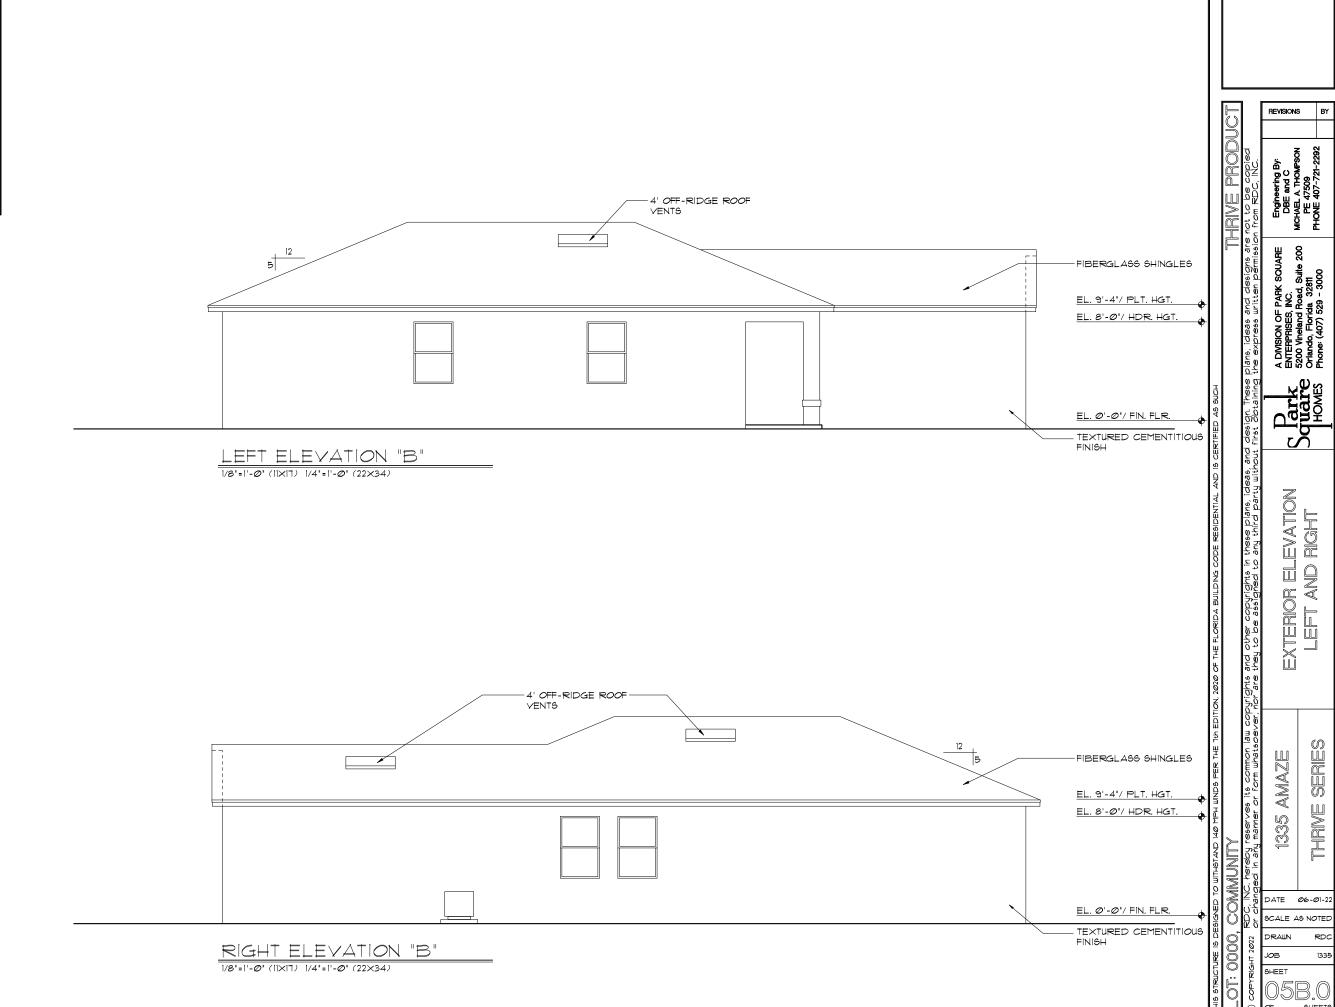


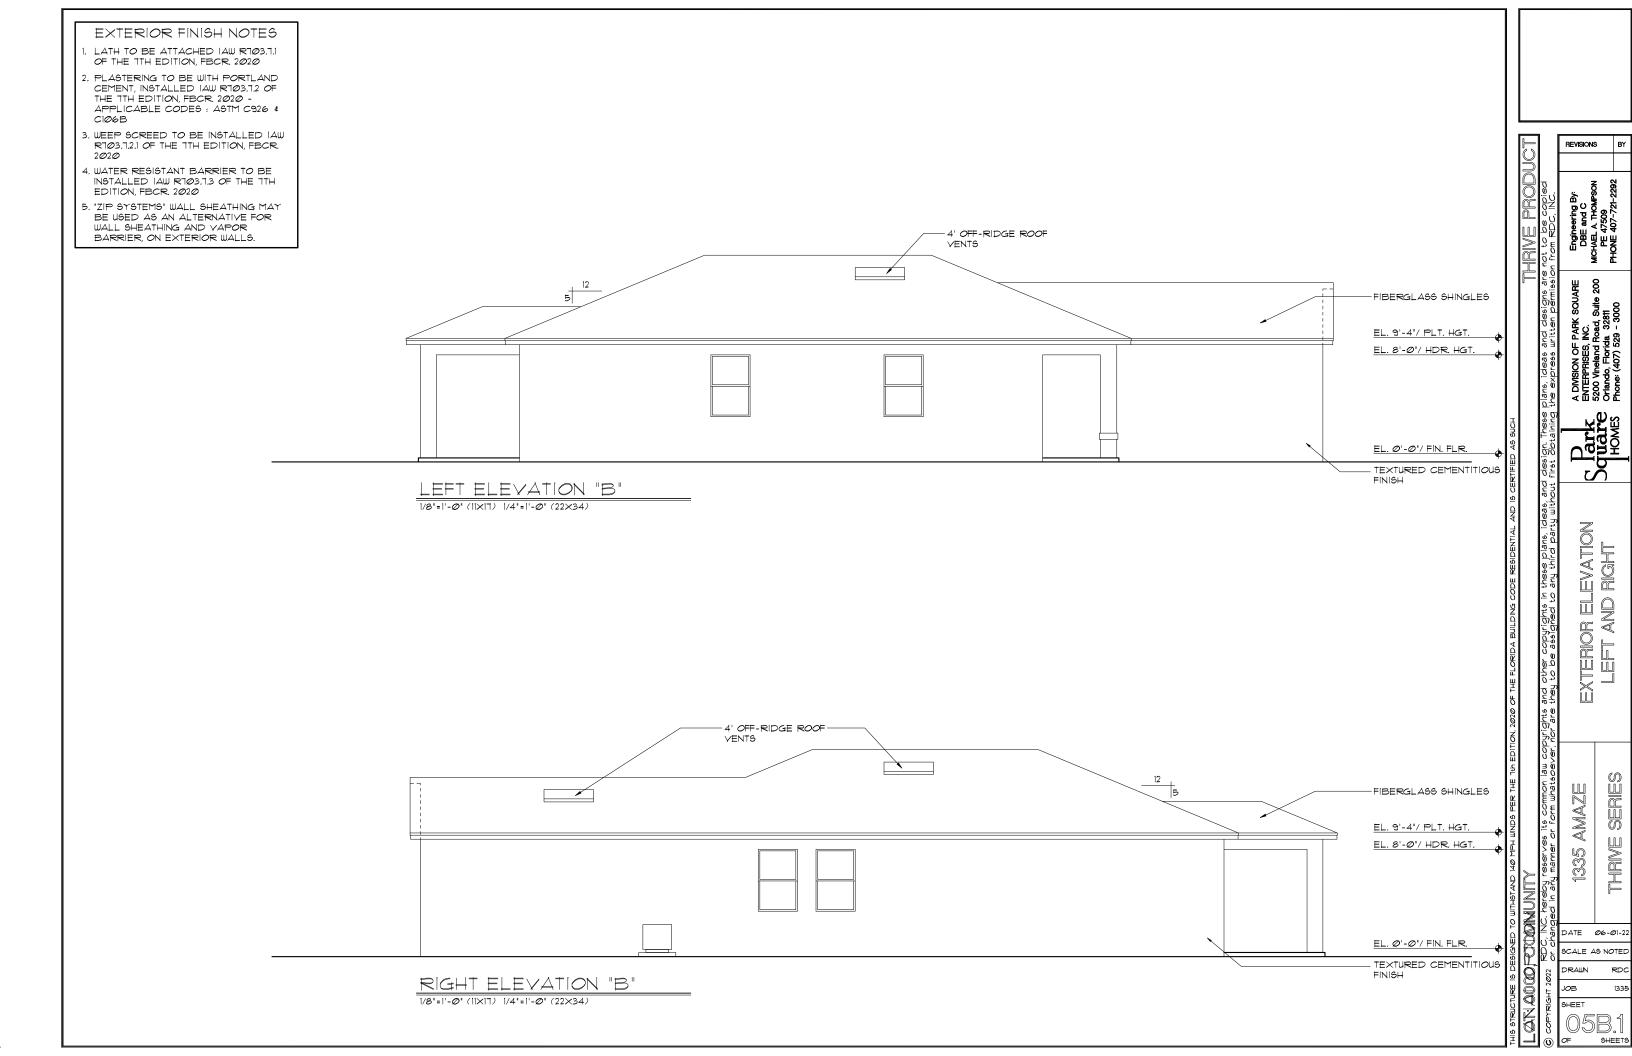



- . LATH TO BE ATTACHED IAW R703.7.1 OF THE 1TH EDITION, FBCR. 2020
- 2. PLASTERING TO BE WITH PORTLAND CEMENT, INSTALLED IAW R103.1.2 OF THE 1TH EDITION, FBCR. 2020 -APPLICABLE CODES: ASTM C926 & CIOSB
- 3. WEEP SCREED TO BE INSTALLED IAW R103.7.2.1 OF THE 1TH EDITION, FBCR. 2020
- 4. WATER RESISTANT BARRIER TO BE INSTALLED IAW R703.7.3 OF THE 1TH EDITION, FBCR. 2020
- 5. "ZIP SYSTEMS" WALL SHEATHING MAY BE USED AS AN ALTERNATIVE FOR WALL SHEATHING AND VAPOR BARRIER, ON EXTERIOR WALLS.

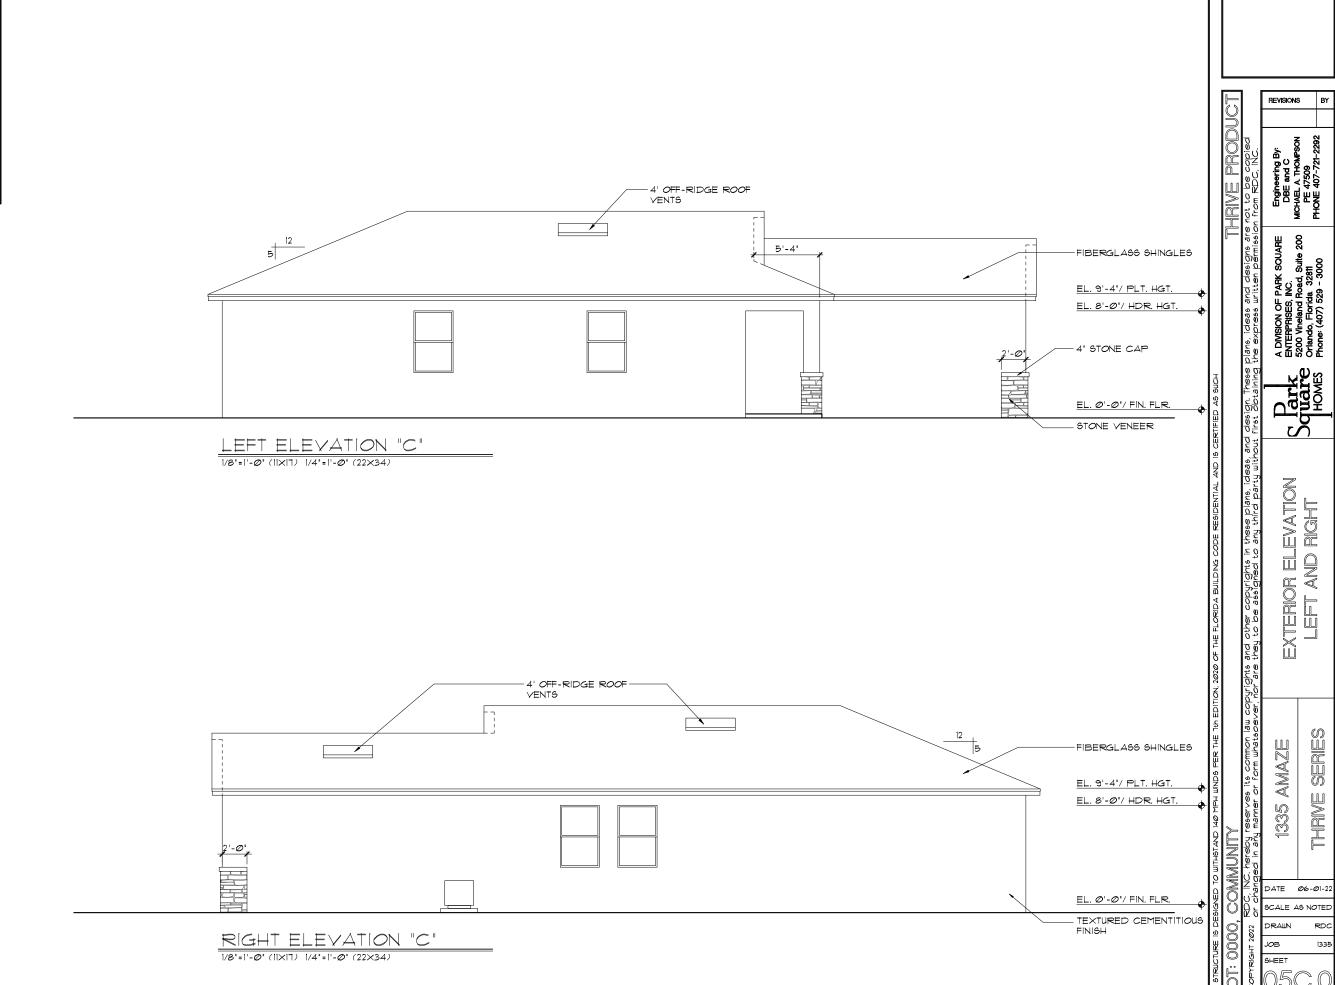


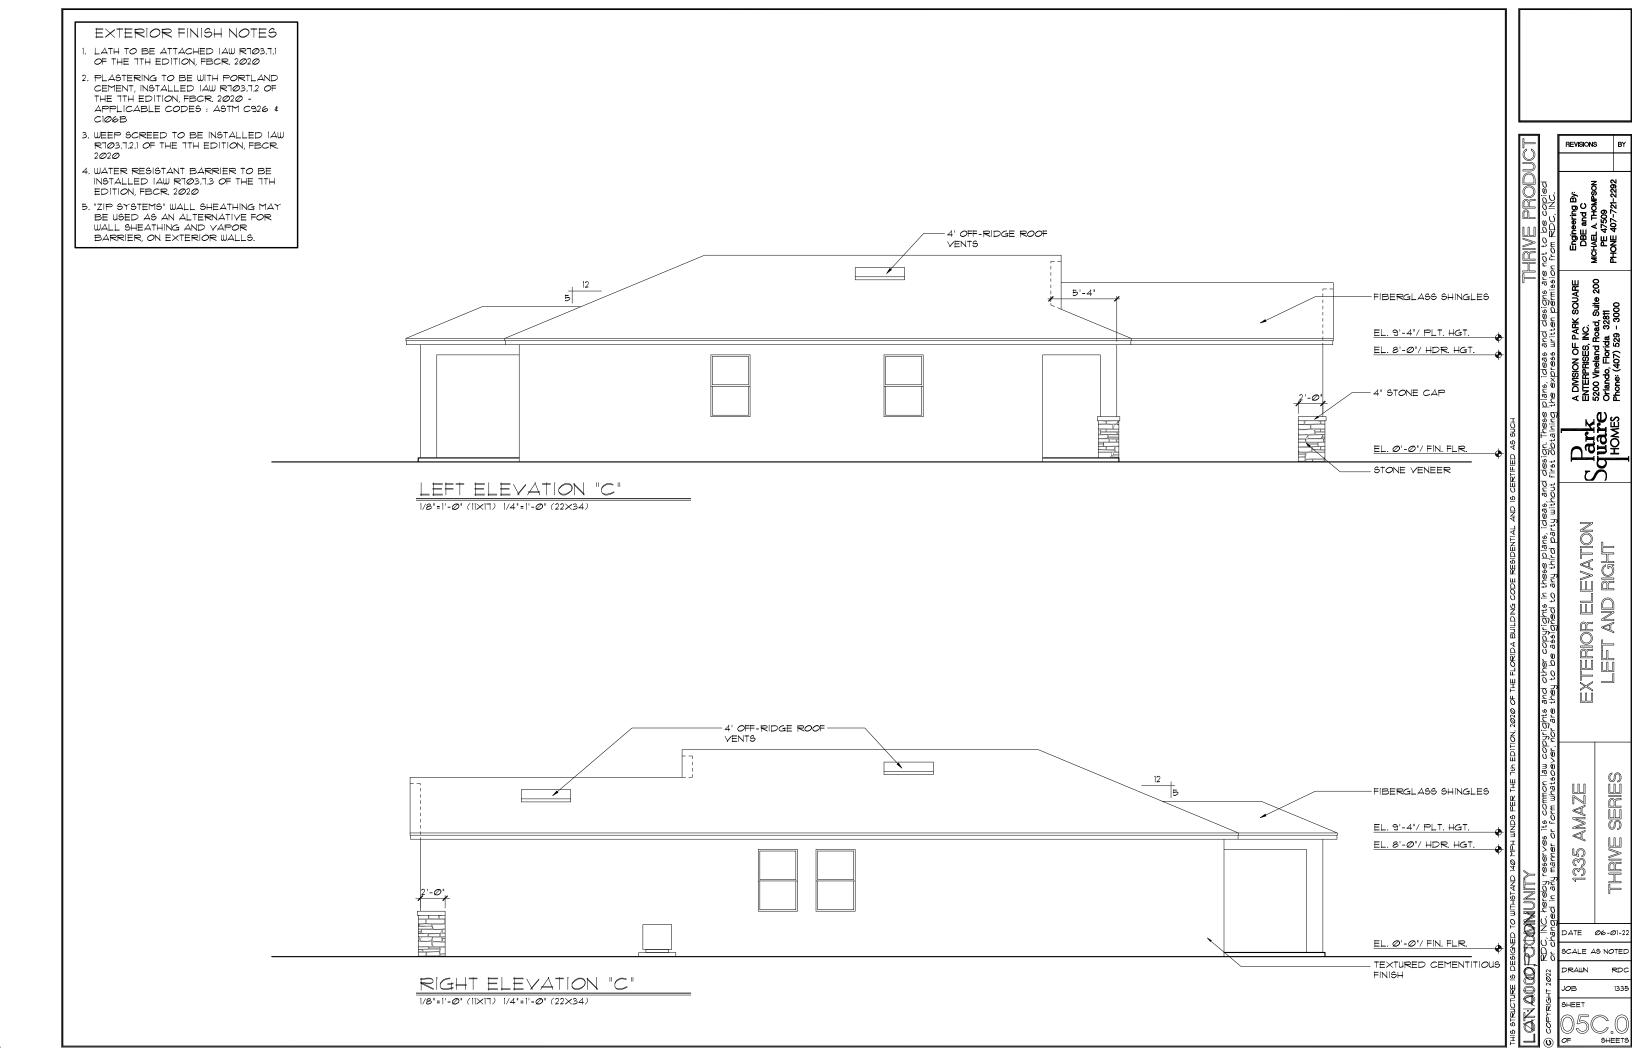











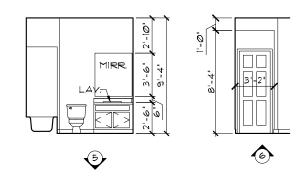

INTERIOR ELEVATIONS

|/8"=1'-Ø" (||X|7) ||/4"=|'-Ø" (22X34)

NOTE: INTERIOR ELEVATIONS ARE CONCEPTUAL ONLY. SEE CABINET SHOP DRAWINGS FOR FINAL VERIFICATION.

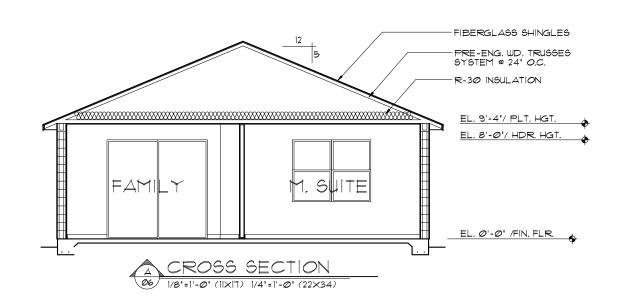

CROSS SECTION / INTERIOR ELEVATIONS 1335 AMAZE DATE **06-0**1-22 SHEET

THRIVE SERIES


REVISIONS BY

SCALE AS NOTED

- 2.) SUFFICIENT SPACE SHALL BE PROVIDED ADJACENT TO THE MECHANICAL COMPONENTS TO ASSURE ADEQUATE ACCESS FOR:
- A) CONSTRUCTION AND SEALING, AND B) SECTION MIGOI PER THE FBCR 2017 6TH ED.
- 3.) AIR CONDITIONING SYSTEM SHALL BE COMPLETELY BALANCED. ALL ROOMS ISOLATED FROM THE RETURN AIR SHALL BE PROVIDED WITH MEANS TO COMPLY WITH SECTION MIGO2 OF THE FBCR CODE 2017 6TH EDITION.
- 4.) IAW NEC 2014- 210.12(A)-ALL 15A OR 20A, 120V BRANCH CIRCUITS THAT SUPPLY OUTLETS OR DEVICES IN DWELLING UNITS- KITCHENS, FAMILY RMS, DINING RMS, LIVING RMS, PARLORS, IBRARIES DENS BEDROOMS SUNROOMS RECREATION RMS, CLOSETS, HALLWAYS, LAUNDRY AREAS, OR SIM. ROOMS OR AREAS SHALL BE PROTECTED BY ANY OF THE MEANS DESCRIBED IN THIS SECTION.
- 5.) IAW NEC 2014- 406.11, ALL 15A AND 20A, 125V RECEPTACLES SHALL BE LISTED AS TAMPER RESISTANT.
- 6.) SMOKE ALARMS SHALL BE IN ALL SLEEPING AREAS, SHALL BE INTERCONNECTED, SHALL BE WITHIN I' TO 3' OF PEAK & SHALL BE 3' FROM THE SUPPLY OR RETURN AIR- STREAM & EQUIPPED W/ 4 BATTERY BACKUP. ALARMS MAY NOT BE CONNECTED WHERE ALARMS ARE WIRELESS & ALL ALARMS SOUND UPON ACTIVATION IAW FBCR R314.3 & R314.4. MODEL* TO BE USED ON THIS JOB TO BE:


BRK: SMOKE-9120B, C/O- SC9120B KIDDE: SMOKE-21007581, C/O 21006377-N

- 1.) ALL WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM IS' ABOVE GARAGE FLOOR UNLESS WATER HEATER IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED P28Ø1.7
- 8.) ALL EQUIPMENT & APPLIANCES, INCLUDING WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM IS' ABOVE GARAGE FLOOR UNLESS IT IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT IAW FBCR 2017, 6TH ED.
- 9.) THE TOTAL LENGTH OF VENTING FOR DRYER TO BE: 5-0' MAXIMUM-THE EXHAUST DUCT SHALL TERMINATE NOT LESS THAN 3 FEET (914MM) IN ANY DIRECTION FROM OPENINGS INTO BUILDINGS. PER FBCR 2017, 6TH ED. MI502.3

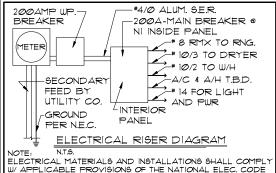

ELECTRICAL MATERIALS AND INSTALLATIONS SHALL COMPLY W/ APPLICABLE PROVISIONS OF THE NATIONAL ELEC. CODE 250.52(AXI) TO (6), LOCAL CODES & LOCAL POWER COMPANY

ELECTRICAL LEGEND							
\$	SINGLE POLE SWITCH	\forall	OUTLET, TV/CABLE				
\$3	THREE WAY SWITCH	_ ■	OUTLET, PHONE				
Φ	OUTLET 110-115	ď	INTERCOM				
Ф	OUT. 110-115, SPLIT WIRED	000	CHIMES				
•	OUT. 110-115, W/ USB		SMOKE DETECTOR				
Ф	OUT. 110-115, CLG. MOUNT.	CM	CARBON MONOXIDE				
Ф	OUT. 110-115, FLR. MOUNT.	매	PUSH BUTTON				
•	SPCL. PURPOSE 220-240	6	EXHAUST FAN				
\Diamond	LIGHT FIXT., CLG. MTD.	-\$-	EX. FAN/LIGHT COMBO				
Ţ.	LIGHT FIXT., WALL MTD.	0	DISPOSAL				
	LIGHT FIXT., RECESSED		ELECTRICAL PANEL				
•	LIGHT FIXT., LED	P	CEILING FAN, PREWIRE				
ļ.	LIGHT FIXT., PULL CHAIN	E	CEILING FAN, INSTALL				
Ĭ	LIGHT FIXT,FLUORESCENT	J	ELECT. JUNCTION BOX				
4	LIGHT FIXT., EXT. FLOODS	Dī	THERMOSTAT				
EXIT	LIGHT FIXT., EMERG. EXIT	DC	DISCONNECT SWITCH				
	LIGHT FIXT., EXIT/BACKUP		ELEC. POWER METER				

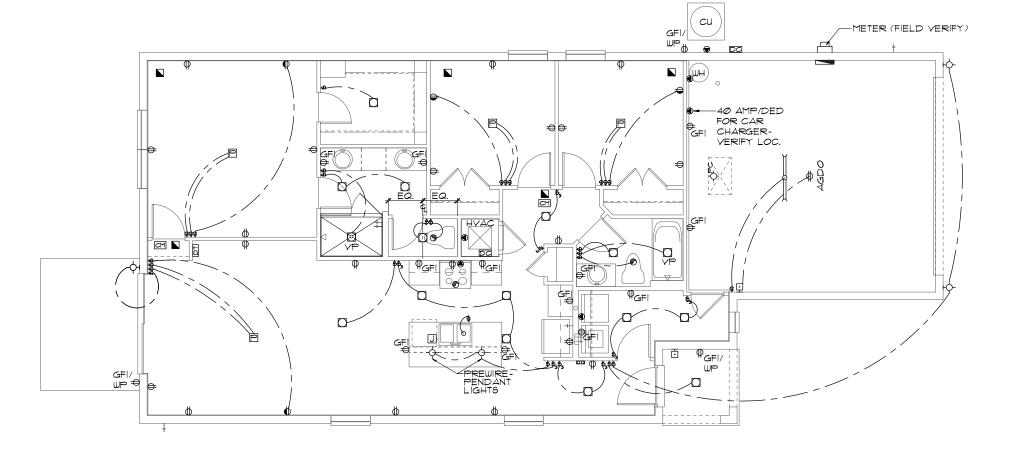

ELECTRICAL PLAN A.B.C.

1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)


REVISIONS SERIES AMAZE THRIVE 1335 DATE Ø6-Ø1-22 SCALE AS NOTED

JOB SHEET


- 2.) SUFFICIENT SPACE SHALL BE PROVIDED ADJACENT TO THE MECHANICAL COMPONENTS TO ASSURE ADEQUATE ACCESS FOR:
- A) CONSTRUCTION AND SEALING, AND B) SECTION MIGØI PER THE FBCR 2017 6TH ED.
- 3.) AIR CONDITIONING SYSTEM SHALL BE COMPLETELY BALANCED. ALL ROOMS ISOLATED FROM THE RETURN AIR SHALL BE PROVIDED WITH MEANS TO COMPLY WITH SECTION MIGØ2 OF THE FBCR CODE 2017 6TH EDITION.
- 4.) IAW NEC 2014- 210,12(A)-ALL 15A OR 20A, 120V BRANCH CIRCUITS THAT SUPPLY OUTLETS OR DEVICES IN DWELLING UNITS- KITCHENS, FAMILY RMS, DINING RMS, LIVING RMS, PARLORS, LIBRARIES, DENS, BEDROOMS, SUNROOMS, RECREATION RMS, CLOSETS, HALLWAYS, LAUNDRY AREAS, OR SIM. ROOMS OR AREAS SHALL BE PROTECTED BY ANY OF THE MEANS DESCRIBED IN THIS SECTION.
- 5.) IAW NEC 2014- 406.11, ALL 15A AND 20A, 125V RECEPTACLES SHALL BE LISTED AS TAMPER RESISTANT.
- 6.) SMOKE ALARMS SHALL BE IN ALL SLEEPING AREAS, SHALL BE INTERCONNECTED, SHALL BE WITHIN 1 TO 3' OF PEAK & SHALL BE 3' FROM THE SUPPLY OR RETURN AIR- STREAM & EQUIPPED W/ A BATTERY BACKUP. ALARMS MAY NOT BE CONNECTED WHERE ALARMS ARE WIRELESS & ALL ALARMS SOUND UPON ACTIVATION IAW FBCR R314.3 & R314.4. MODEL* TO BE USED ON THIS JOB TO BE:

BRK: SMOKE-9120B, C/O- SC9120B KIDDE: SMOKE-21007581, C/O 21006377-N

- 1.) ALL WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM IS! ABOVE GARAGE FLOOR UNLESS WATER HEATER IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED. P2801.1
- 8.) ALL EQUIPMENT & APPLIANCES, INCLUDING WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION 15 MINIMUM 18" ABOVE GARAGE FLOOR UNLESS IT 15 LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED.
- 9.) THE TOTAL LENGTH OF VENTING FOR DRYER TO BE: 5'-0' MAXIMUM-THE EXHAUST DUCT SHALL TERMINATE NOT LESS THAN 3 FEET (914MM) IN ANY DIRECTION FROM OPENINGS INTO BUILDINGS, PER FBCR 2017, 6TH ED. MISO2.3

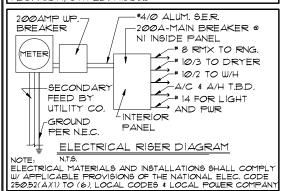

ELECTRICAL LEGEND						
\$	SINGLE POLE SWITCH	\forall	OUTLET, TV/CABLE			
\$3	THREE WAY SWITCH	•	OUTLET, PHONE			
Ф	OUTLET 110-115	ŏ	INTERCOM			
•	OUT. 110-115, SPLIT WIRED	000	CHIMES			
•	OUT. 110-115, W/ USB		SMOKE DETECTOR			
ф	OUT. 110-115, CLG. MOUNT.	ĭ	CARBON MONOXIDE			
Ф	OUT. 110-115, FLR. MOUNT.	ŏ	PUSH BUTTON			
•	SPCL. PURPOSE 220-240	6	EXHAUST FAN			
\Diamond	LIGHT FIXT., CLG. MTD.	\$	EX. FAN/LIGHT COMBO			
Ţ	LIGHT FIXT., WALL MTD.	0	DISPOSAL			
	LIGHT FIXT., RECESSED		ELECTRICAL PANEL			
•	LIGHT FIXT., LED		CEILING FAN, PREWIRE			
ļ.	LIGHT FIXT., PULL CHAIN	ш	CEILING FAN, INSTALL			
Ĭ	LIGHT FIXT,FLUORESCENT	\Box	ELECT. JUNCTION BOX			
4	LIGHT FIXT., EXT. FLOODS	DT	THERMOSTAT			
	LIGHT FIXT., EMERG. EXIT	DC	DISCONNECT SWITCH			
4	LIGHT FIXT FXIT/BACKUP	Щ	ELEC POWER METER			

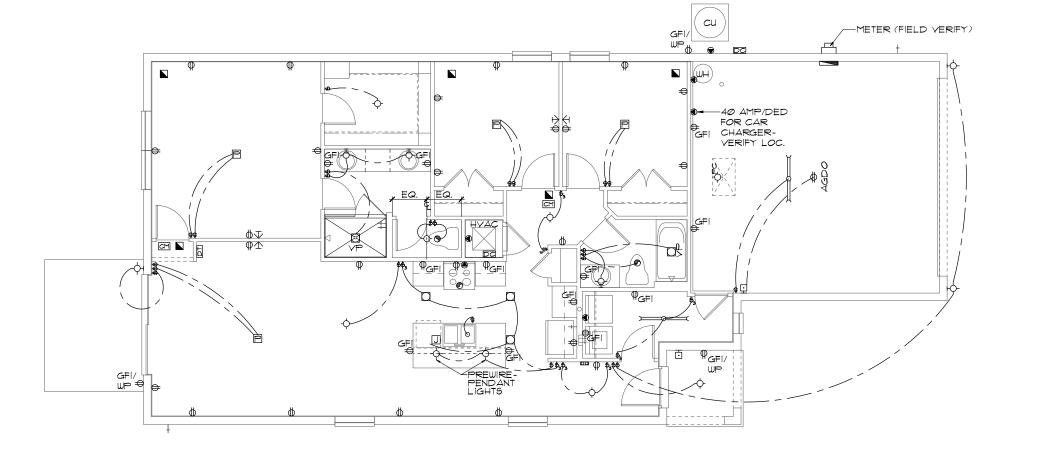

REVISIONS

SERIES

THRIVE

SHEETS

DATE 06-01-22 SCALE AS NOTED

SHEET

AMAZE


ELECTRICAL PLAN A.B.C

1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)

- 2.) SUFFICIENT SPACE SHALL BE PROVIDED ADJACENT TO THE MECHANICAL COMPONENTS TO ASSURE ADEQUATE ACCESS FOR:
- A) CONSTRUCTION AND SEALING, AND B) SECTION MIGOI PER THE FBCR 2017 6TH ED.
- 3.) AIR CONDITIONING SYSTEM SHALL BE COMPLETELY BALANCED. ALL ROOMS ISOLATED FROM THE RETURN AIR SHALL BE PROVIDED WITH MEANS TO COMPLY WITH SECTION MIGOZ OF THE FBCR CODE 2017 6TH EDITION.
- 4.) IAW NEC 2014- 210.12(A)-ALL 15A OR 20A, 120V BRANCH CIRCUITS THAT SUPPLY OUTLETS OR DEVICES IN DWELLING UNITS- KITCHENS, FAMILY RMS, DINING RMS, LIVING RMS, PARLORS, LIBRARIES DENS BEDROOMS SUNROOMS RECREATION RMS, CLOSETS, HALLWAYS, LAUNDRY AREAS, OR SIM. ROOMS OR AREAS SHALL BE PROTECTED BY ANY OF THE MEANS DESCRIBED IN THIS SECTION.
- 5.) IAW NEC 2014- 406.11, ALL 15A AND 20A, 125V RECEPTACLES SHALL BE LISTED AS TAMPER RESISTANT.
- 6.) SMOKE ALARMS SHALL BE IN ALL SLEEPING AREAS, SHALL BE INTERCONNECTED, SHALL BE WITHIN I' TO 3' OF PEAK & SHALL BE 3' FROM THE SUPPLY OR RETURN AIR- STREAM & EQUIPPED W/ 4 BATTERY BACKUP. ALARMS MAY NOT BE CONNECTED WHERE ALARMS ARE WIRELESS & ALL ALARMS SOUND UPON ACTIVATION IAW FBCR R314.3 & R314.4. MODEL* TO BE USED ON THIS JOB TO BE: BRK: SMOKE-9120B, C/O- SC9120B


KIDDE: SMOKE-21007581, C/O 21006377-N

- 1.) ALL WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM IS' ABOVE GARAGE FLOOR UNLESS WATER HEATER IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED P28Ø1.7
- 8.) ALL EQUIPMENT & APPLIANCES, INCLUDING WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM IS' ABOVE GARAGE FLOOR UNLESS IT IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT IAW FBCR 2017, 6TH ED.
- 9.) THE TOTAL LENGTH OF VENTING FOR DRYER TO BE: 5-0' MAXIMUM-THE EXHAUST DUCT SHALL TERMINATE NOT LESS THAN 3 FEET (914MM) IN ANY DIRECTION FROM OPENINGS INTO BUILDINGS. PER FBCR 2017, 6TH ED. MI502.3

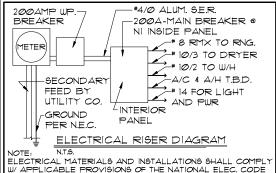

ELECTRICAL MATERIALS AND INSTALLATIONS SHALL COMPLY W/ APPLICABLE PROVISIONS OF THE NATIONAL ELEC. CODE 250.52(AXI) TO (6), LOCAL CODES & LOCAL POWER COMPANY

ELECTRICAL LEGEND						
\$	SINGLE POLE SWITCH	\forall	OUTLET, TV/CABLE			
\$3	THREE WAY SWITCH	◂	OUTLET, PHONE			
∌	OUTLET 110-115	凸	INTERCOM			
-	OUT. 110-115, SPLIT WIRED	000	CHIMES			
€	OUT. 110-115, W/ USB		SMOKE DETECTOR			
#	OUT. 110-115, CLG. MOUNT.	CM	CARBON MONOXIDE			
⊖	OUT. 110-115, FLR. MOUNT.	래	PUSH BUTTON			
◉	SPCL. PURPOSE 220-240	6	EXHAUST FAN			
\diamondsuit	LIGHT FIXT., CLG. MTD.	-\$-	EX. FAN/LIGHT COMBO			
\	LIGHT FIXT., WALL MTD.	0	DISPOSAL			
	LIGHT FIXT., RECESSED		ELECTRICAL PANEL			
•	LIGHT FIXT., LED	P	CEILING FAN, PREWIRE			
Ģ₽C	LIGHT FIXT., PULL CHAIN	E	CEILING FAN, INSTALL			
Ħ	LIGHT FIXT,FLUORESCENT	IJ	ELECT. JUNCTION BOX			
44	LIGHT FIXT., EXT. FLOODS	DT	THERMOSTAT			
EXIT	LIGHT FIXT., EMERG. EXIT	DC	DISCONNECT SWITCH			
$\stackrel{\bigoplus}{}$	LIGHT FIXT., EXIT/BACKUP		ELEC. POWER METER			

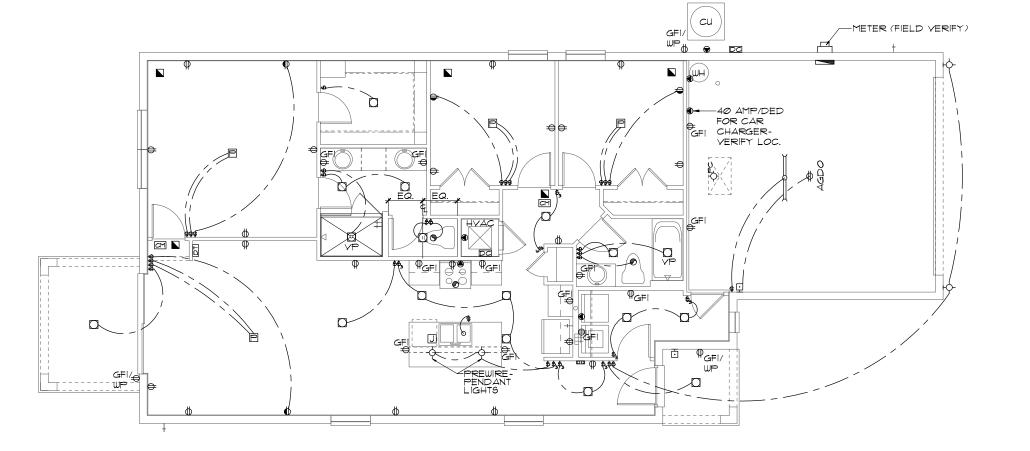

ELECTRICAL PLAN A.B.C.

1/8"=1'-0" (11×17) 1/4"=1'-0" (22×34)

SERIES AMAZE THRIVE 332 DATE Ø6-Ø1-22 SCALE AS NOTED JOB SHEET


SHEETS

REVISIONS


- 2.) SUFFICIENT SPACE SHALL BE PROVIDED ADJACENT TO THE MECHANICAL COMPONENTS TO ASSURE ADEQUATE ACCESS FOR:
- A) CONSTRUCTION AND SEALING, AND B) SECTION MIGØI PER THE FBCR 2017 6TH ED.
- 3.) AIR CONDITIONING SYSTEM SHALL BE COMPLETELY BALANCED. ALL ROOMS ISOLATED FROM THE RETURN AIR SHALL BE PROVIDED WITH MEANS TO COMPLY WITH SECTION MIGØ2 OF THE FBCR CODE 2017 6TH EDITION.
- 4.) IAW NEC 2014- 210.12(A)-ALL 15A OR 20A, 120V BRANCH CIRCUITS THAT SUPPLY OUTLETS OR DEVICES IN DWELLING UNITS- KITCHENS, FAMILY RMS, DINING RMS, LIVING RMS, PARLORS, LIBRARIES, DENS, BEDROOMS, SUNROOMS, RECREATION RMS, CLOSETS, HALLWAYS, LAUNDRY AREAS, OR SIM. ROOMS OR AREAS SHALL BE PROTECTED BY ANY OF THE MEANS DESCRIBED IN THIS SECTION.
- 5.) IAW NEC 2014- 406.11, ALL 15A AND 20A, 125V RECEPTACLES SHALL BE LISTED AS TAMPER RESISTANT.
- 6.) SMOKE ALARMS SHALL BE IN ALL SLEEPING AREAS, SHALL BE INTERCONNECTED, SHALL BE WITHIN 1 TO 3' OF PEAK & SHALL BE 3' FROM THE SUPPLY OR RETURN AIR- STREAM & EQUIPPED W/ A BATTERY BACKUP. ALARMS MAY NOT BE CONNECTED WHERE ALARMS ARE WIRELESS & ALL ALARMS SOUND UPON ACTIVATION IAW FBCR R314.3 & R314.4. MODEL* TO BE USED ON THIS JOB TO BE:

BRK: SMOKE-9120B, C/O- SC9120B KIDDE: SMOKE-21007581, C/O 21006377-N

- 1.) ALL WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION IS MINIMUM 181 ABOVE GARAGE FLOOR UNLESS WATER HEATER IS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED. P2801.7
- 8.) ALL EQUIPMENT & APPLIANCES, INCLUDING WATER HEATERS HAVING AN IGNITION SOURCE TO BE ELEVATED SUCH THAT THE SOURCE OF IGNITION 15 MINIMUM 18" ABOVE GARAGE FLOOR UNLESS IT 15 LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT. IAW FBCR 2017, 6TH ED.
- 9.) THE TOTAL LENGTH OF VENTING FOR DRYER TO BE: 5'-0' MAXIMUM-THE EXHAUST DUCT SHALL TERMINATE NOT LESS THAN 3 FEET (914MM) IN ANY DIRECTION FROM OPENINGS INTO BUILDINGS. PER FBCR 2017, 6TH ED. MIS02.3

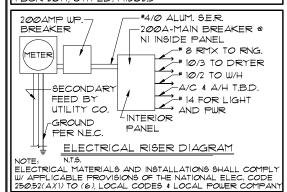

	<u></u>						
<u>ELECTRICAL LEGEND</u>							
\$	SINGLE POLE SWITCH	\forall	OUTLET, TV/CABLE				
\$3	THREE WAY SWITCH	•	OUTLET, PHONE				
Ф	OUTLET 110-115	ŏ	INTERCOM				
•	OUT. 110-115, SPLIT WIRED	000	CHIMES				
*	OUT. 110-115, W/ USB		SMOKE DETECTOR				
ф	OUT. 110-115, CLG. MOUNT.	ĭ	CARBON MONOXIDE				
₽	OUT. 110-115, FLR. MOUNT.	ŏ	PUSH BUTTON				
•	SPCL. PURPOSE 220-240	6	EXHAUST FAN				
\Diamond	LIGHT FIXT., CLG. MTD.	\$	EX. FAN/LIGHT COMBO				
Ţ	LIGHT FIXT., WALL MTD.	0	DISPOSAL				
	LIGHT FIXT., RECESSED		ELECTRICAL PANEL				
•	LIGHT FIXT., LED		CEILING FAN, PREWIRE				
Ų₽°	LIGHT FIXT., PULL CHAIN	E	CEILING FAN, INSTALL				
Ĭ	LIGHT FIXT,FLUORESCENT	\Box	ELECT. JUNCTION BOX				
4	LIGHT FIXT., EXT. FLOODS	DT	THERMOSTAT				
EXIT	LIGHT FIXT., EMERG. EXIT	DO	DISCONNECT SWITCH				
4	LIGHT FIXT., EXIT/BACKUP		ELEC. POWER METER				

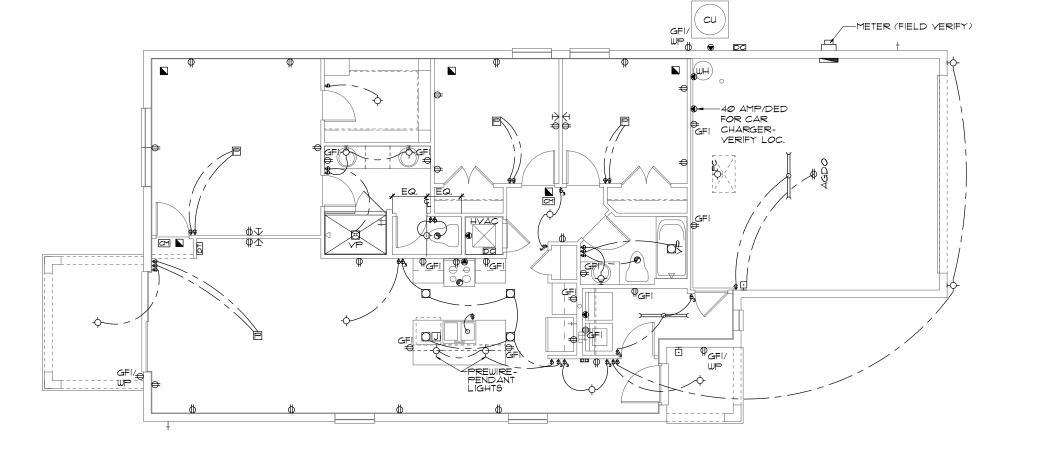


ELECTRICAL PLAN A.B.C

1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)

REVISIONS SERIES AMAZE THRIVE 332 DATE Ø6-Ø1-22

SCALE AS NOTED

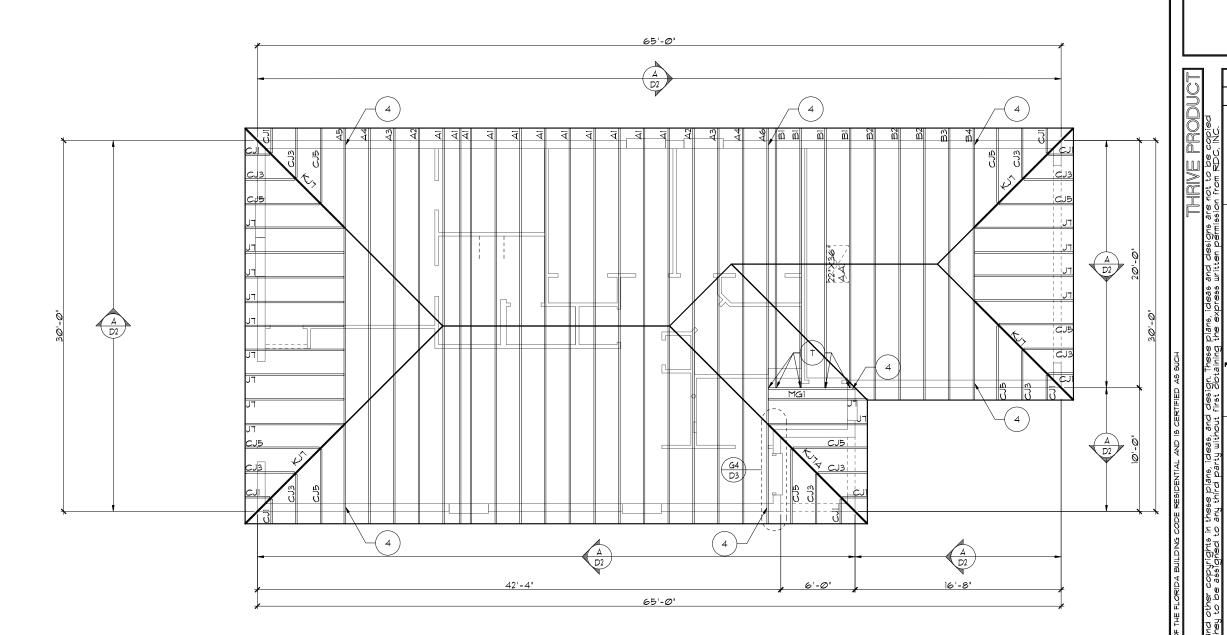

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL

BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,7838.F. = 5.948F NET

UPPER PORTION VENTILATION TOTAL: 2.55SF PROVIDED W/OFF RIDGE VENTS: 3 VENTS a .85S.F. /YENT.

TILE: O'HAGIN MODEL "S", SHINGLE: LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 17.22SF PROVIDED W/SOFFITS @ EAVE: 198L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: 42% LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- 4. ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- D. REFER TO TRUSS MANUFACTURER'S

 DRAWINGS FOR TRUSS PLACEMENT 4 TRUSS TO TRUSS CONNECTIONS.
- . TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3

SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.1.1

TRUSS LAYOUT "A"


1/8"=1'-@" (11×17) 1/4"=1'-@" (22×34)

SERIES AMAZE 1335 DATE 06-01-22

SCALE AS NOTED

HUSS

REVISIONS BY

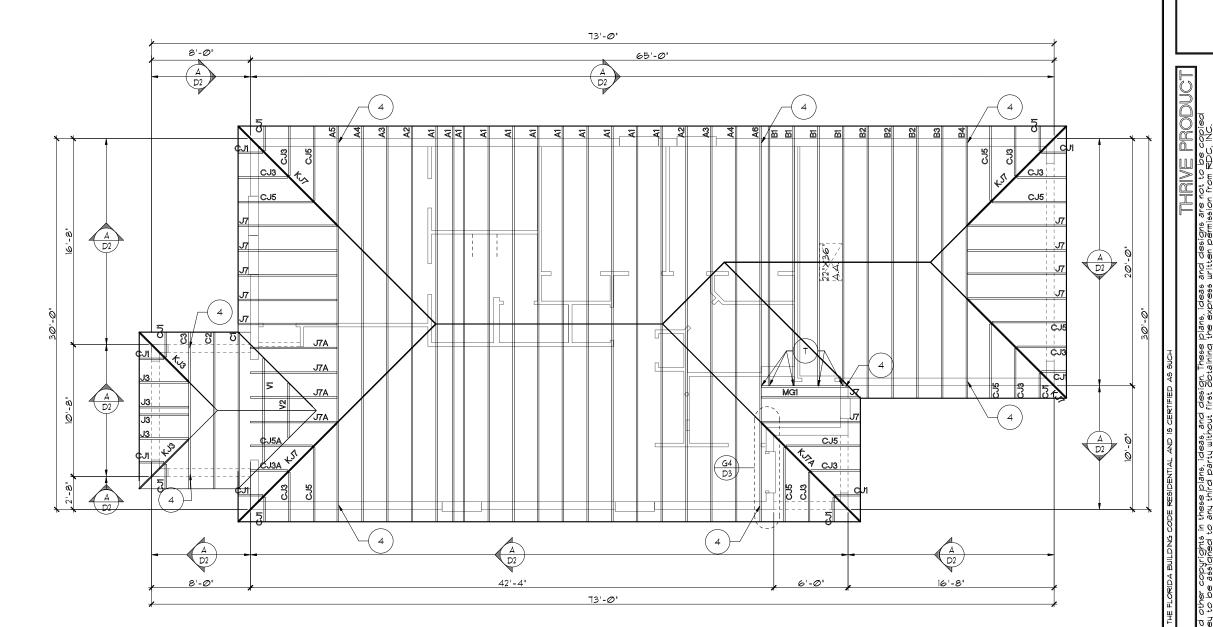

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER

PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,863S.F. = 6.21SF NET

REQ'E

UPPER PORTION VENTILATION TOTAL: 2.55SF PROVIDED WOFF RIDGE VENTS: 3 VENTS **8.858.F.** /VENT. (TILE: O"HAGIN MODEL "9", SHINGLE:

LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 18.61SF PROVIDED W/SOFFITS @ EAVE: 214L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- 4. ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- 6. REFER TO TRUGG MANUFACTURER'S DRAWINGS FOR TRUGG PLACEMENT & TRUSS TO TRUSS CONNECTIONS.
- . TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3

SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH



1/8"=1'-Ø" (11×17) 1/4"=1'-Ø" (22×34)

AMAZE


DATE 06-01-22 SCALE AS NOTED

FUSS

SERIES

THRIVE

REVISIONS BY

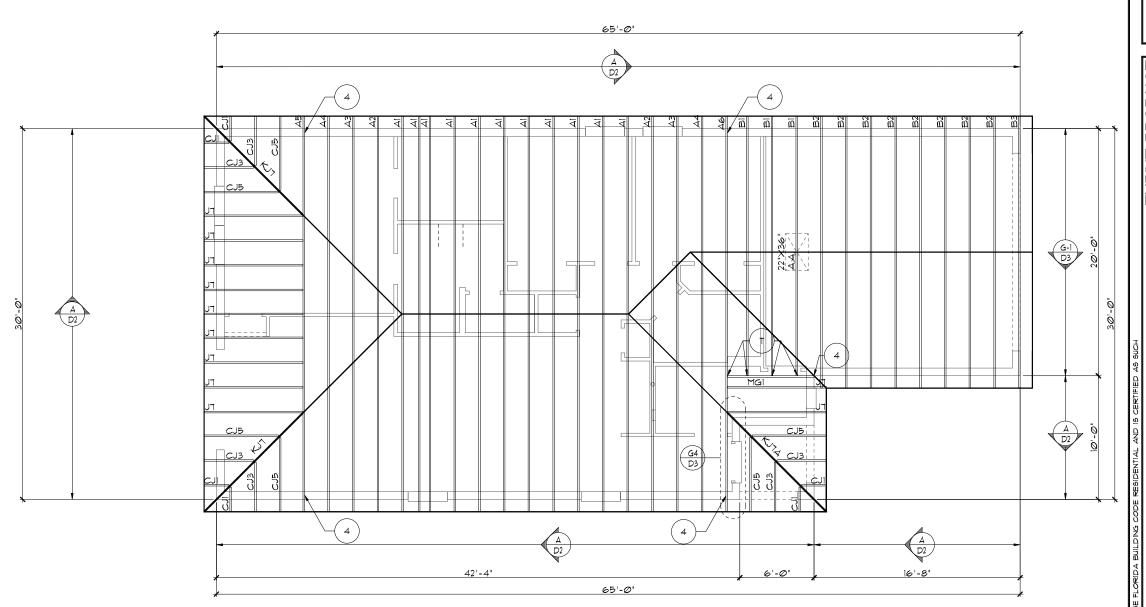

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER

PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,7838.F. = 5.948F NET

UPPER PORTION VENTILATION TOTAL: 2.558F PROVIDED WOFF RIDGE VENTS: 3 VENTS a .85S.F. /YENT.

TILE: O'HAGIN MODEL "S", SHINGLE: LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 17.22SF PROVIDED W/SOFFITS @ EAVE: 198L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: 42% LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- . ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- 6. REFER TO TRUGG MANUFACTURER'S DRAWINGS FOR TRUGG PLACEMENT & TRUSS TO TRUSS CONNECTIONS.
- . TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3
- SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH

TRUSS LAYOUT "B"

1/8"=1'-@" (11×17) 1/4"=1'-@" (22×34)

AMAZE 1335


DATE Ø6-Ø1-22

SCALE AS NOTED

SERIES

REVISIONS BY

SHEET

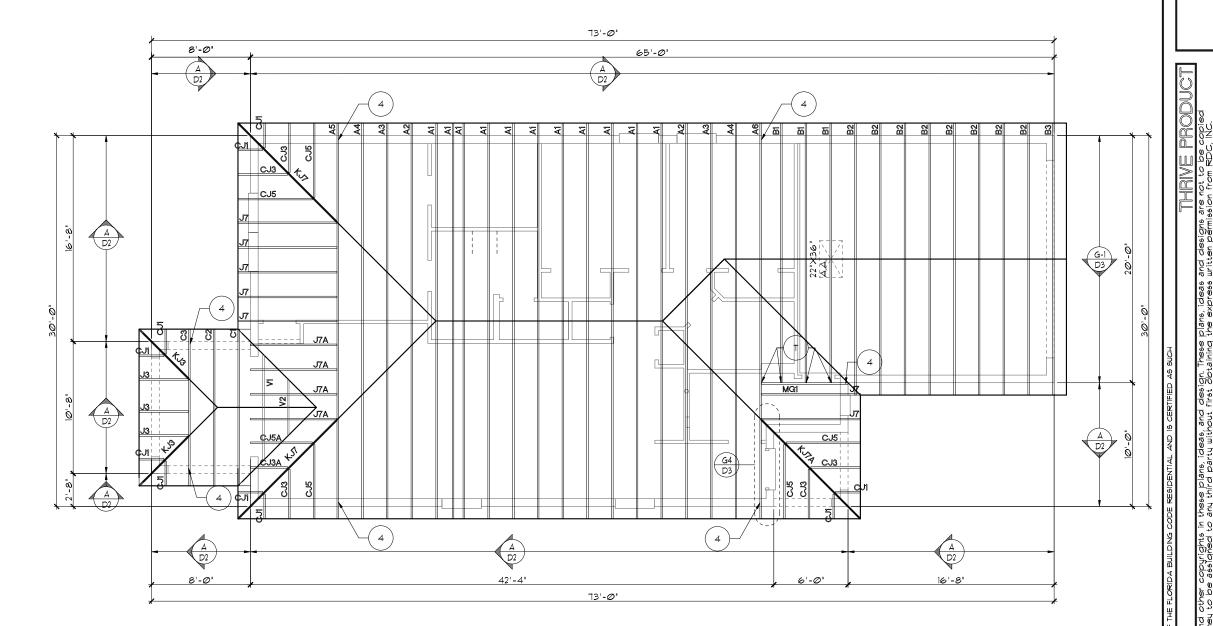

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER

PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,863S.F. = 6.21SF NET

UPPER PORTION VENTILATION TOTAL: 2558F PROVIDED WOFF RIDGE VENTS: 3 VENTS a .85S.F. /YENT.

TILE: O"HAGIN MODEL "S", SHINGLE: LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 18.61SF PROVIDED W/SOFFITS @ EAVE: 214L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- 4. ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- DRAWINGS FOR TRUSS PLACEMENT & TRUSS TO TRUSS CONNECTIONS.
- TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3

SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.1.1

TRUSS LAYOUT "B"

1/8"=1'-@" (11×17) 1/4"=1'-@" (22×34)

1335 DATE 06-01-22

SHEET


HUSS

SERIES

REVISIONS BY

SCALE AS NOTED

AMAZE

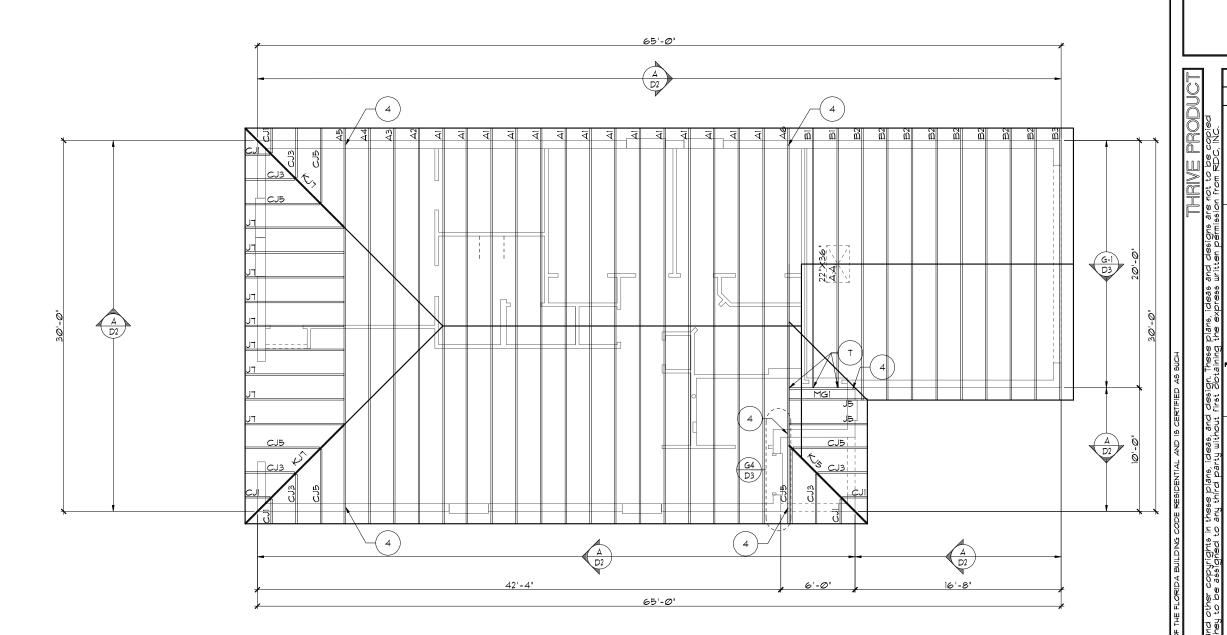

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER

PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,7838.F. = 5.948F NET

UPPER PORTION VENTILATION TOTAL: 2.558F PROVIDED WOFF RIDGE VENTS: 3 VENTS a .85S.F. /YENT.

TILE: O'HAGIN MODEL "S", SHINGLE: LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 17.22SF PROVIDED W/SOFFITS @ EAVE: 198L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: 42% LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- . ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- 6. REFER TO TRUGG MANUFACTURER'S DRAWINGS FOR TRUGG PLACEMENT & TRUSS TO TRUSS CONNECTIONS.
- . TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3

SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH

TRUSS LAYOUT "C"

1/8"=1'-@" (11×17) 1/4"=1'-@" (22×34)

AMAZE


1335 DATE Ø6-Ø1-22 SCALE AS NOTED

SHEET

08C.U

SERIES

REVISIONS BY

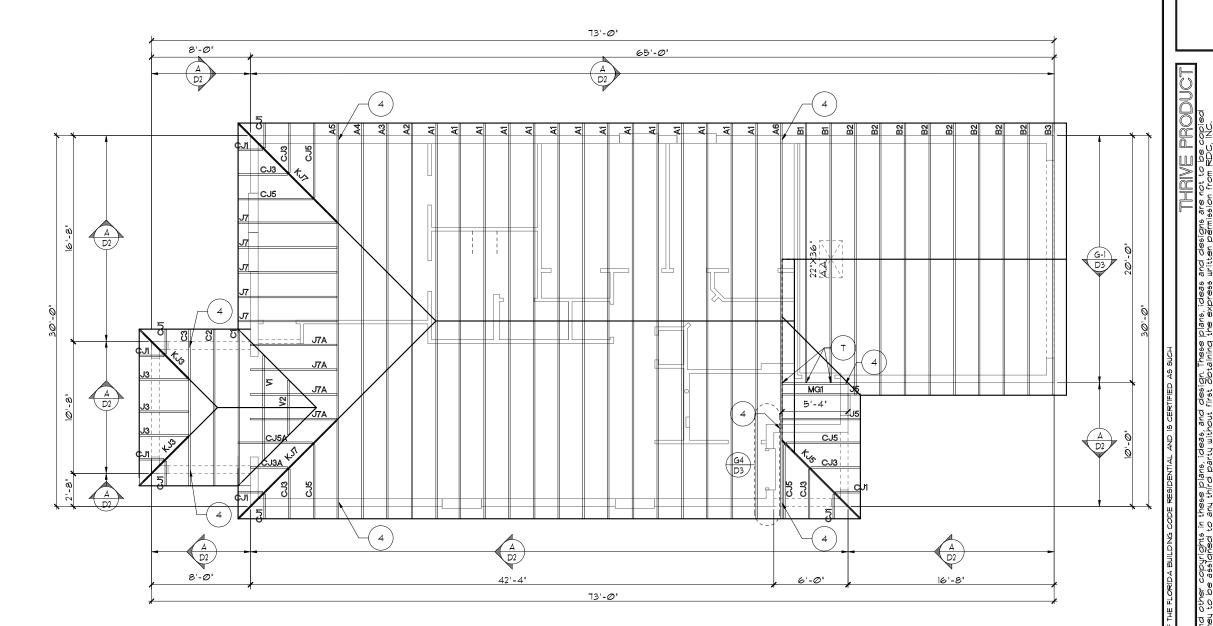

PER FBC2017 6TH EDITION R806: MIN. 40% - MAX, 50% OF REQUIRED VENTILATION TO BE IN UPPER PORTION OF ATTIC SPACE AND THE BALANCE TO BE IN LOWER

PORTION (EAVES). THE MINIMUM NET VENTILATION AREA SHALL BE 1/300 OF VENTED SPACE: TOTAL VENTED SPACE: 1,863S.F. = 6.21SF NET

REQ'E

UPPER PORTION VENTILATION TOTAL: 2.55SF PROVIDED WOFF RIDGE VENTS: 3 VENTS

8.858.F. /VENT. (TILE: O"HAGIN MODEL "9", SHINGLE: LOMANCO 170-D - OR MILLENNIUM METAL)

LOWER PORTION VENTILATION TOTAL: 18.61SF PROVIDED W/SOFFITS @ EAVE: 214L.F.@ 0.087SF VENTING/L.F.

UPPER PORTION PERCENTAGE: LOWER PORTION PERCENTAGE:

NOTES

- TYPICAL ROOF GABLE OVERHANG TO BE 8" UNLESS OTHERWISE NOTED.
- 2. TYPICAL ROOF EAVES OVERHANG TO BE 12" UNLESS OTHERWISE NOTED.
- PROVIDE AND INSTALL FLASHING AND ROOFING AS PER NATIONAL ROOFING AND SHEET METAL ASSOC. STANDARDS AND/ OR ACCEPTABLE INDUSTRY PRACTICE AND IAW THE 2020 1TH EDITION FBCR. PROVIDE ROOF VALLEY FLASHING IAW FBCR R903.2
- 4. ALL ROOF TRUSSES, GIRDERS, BEAMS, HEADERS, ETC. TO BE SIZED BY TRUSS MANUFACTURER OR FL. REG. ENG.
- 5. TRUSSES SHALL BE BRACED TO PRE-VENT ROTATION & PROVIDE LATERAL STABILITY IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE CONSTRUCTION DOCUMENTS FOR BUILDING & ON THE INDIVIDUAL TRUSS DESIGN DRAWINGS. IN THE ABSENCE OF SPECIFIC BRACING REQUIREMENTS, TRUSSES SHALL BE BRACED IN ACCORDANCE WITH TPI/WTCA BCSI
- D. REFER TO TRUSS MANUFACTURER'S

 DRAWINGS FOR TRUSS PLACEMENT 4 TRUSS TO TRUSS CONNECTIONS.
- TILE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH EDITION R905.3

SHINGLE ROOF: UNDERLAYMENT TO BE INSTALLED IAW FBCR 2020, 1TH

TRUSS LAYOUT "C"

1/8"=1'-0" (11×17) 1/4"=1'-0" (22×34)

DATE 06-01-22 SCALE AS NOTED

AMAZE


FUSS

SERIES

THRIVE

REVISIONS BY

SHEET

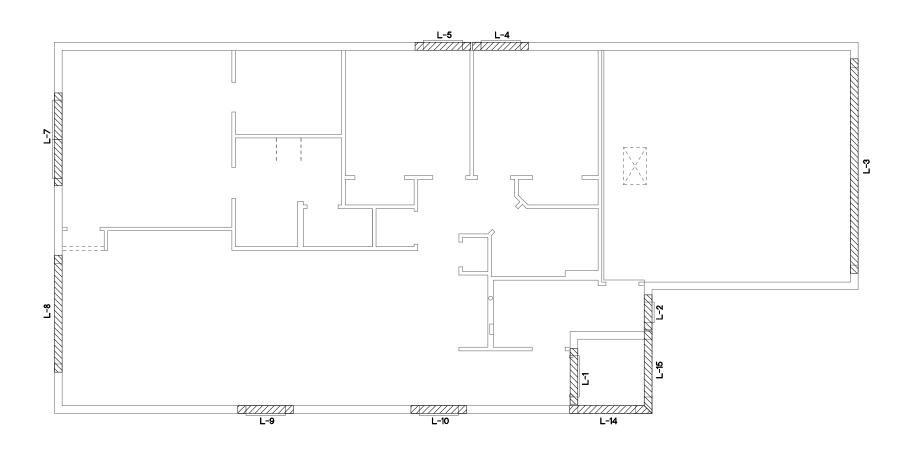

CAST CRETE / LOTT'S / WEKIWA / FLORIDA ROCK LINTEL SCHEDULE								
.INTEL NO.	LENGTH	TYPE	COMMENTS					
L1	4'-6'	8RF12-ØB/IT	3080 FRONT DOOR					
L 2	3'-6"	8F16-ØB/IT	9H14 TMP.					
L 3	17'-4"	8F34-1B/IT	GARAGE DOOR					
L 4	4'-6'	8F16-ØB/IT	9H25					
L 5	4'-6'	8F16-ØB/IT	9H25					
L 6								
LΤ	7'-6"	8F16-ØB/IT	PR. 9H25					

L 18

L 19

L 2Ø L 21 L 22 L 23 L 24


L 25 L 26

L 8 9'-4' 8FI6-ØB/IT 8/Ø×8/Ø 9GD. L 9 4'-6' 8F16-ØB/IT 9H25 L 10 4'-6' 8F16-ØB/1T 9H25 L 11 L 12 L 13 L 14 6'-6' 8FI6-ØB/IT FRONT ENTRY L 15 6'-6' 8FI6-0B/IT FRONT ENTRY L 16 L IT

PRE CAST LINTEL LAYOUT A,B,C 1/8"=|'-Ø" (||X|7) |/4"=|'-Ø" (22X34)

PRE CAST LINTEL THRIVE SERIES 1335 AMAZE

DATE Ø6-Ø1-22 SCALE AS NOTED

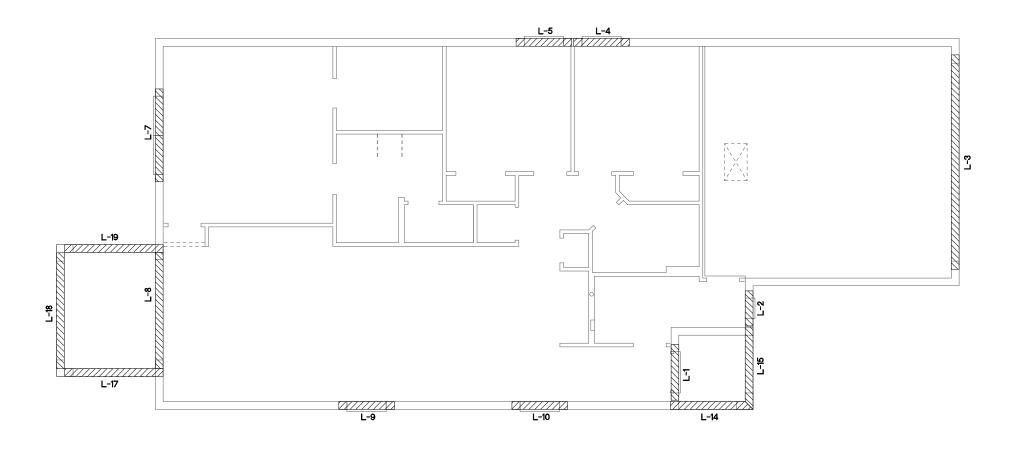

CAST CRETE / LOTT'S / WEKIWA / FLORIDA ROCK								
LINTEL SCHEDULE								
LINTEL NO.	LENGTH	TYPE	COMMENTS					
L 1	4'-6"	8RF12-ØB/IT	3080 FRONT DOOR					
L 2	3'-6'	8F16-ØB/IT	SHI4 TMP.					
L 3	17'-4"	8F34-1B/IT	GARAGE DOOR					
L 4	4'-6"	8F16-ØB/IT	SH25					
L 5	4'-6"	8F16-ØB/IT	SH25					
L 6								
LT	7'-6"	8F16-ØB/IT	PR. 6H25					
L8	9-4'	8F16-ØB/IT	8/0×8/0 5GD.					
L 9	4'-6"	8F16-ØB/IT	SH25					
L 10	4'-6"	8F16-0B/IT	SH25					
L 11								
L 12								
L 13								
L 14	6'-6'	8F16-ØB/IT	FRONT ENTRY					
L 15	6'-6'	8F16-ØB/IT	FRONT ENTRY					
L 16								
L 17	8'-0"	8F16-ØB/IT	REAR LANAI					
L 18	10'-0'	8F16-ØB/IT	REAR LANAI					
L 19	8'-0"	8F16-ØB/IT	REAR LANAI					
L 2Ø								
L 21								
∟ 22								
L 23								
L 24								
L 25								
L 26								

PRE CAST LINTEL LAYOUT A,B,C
1/8"=1"-0" (11x17) 1/4"=1"-0" (22x34)

PRE CAST LINTEL LAYOUT THRIVE SERIES DATE Ø6-Ø1-22

SAFE LOAD TABLES FOR GRAVITY, UPLIFT & LATERAL LOADS

8' PRECAST & PRESTRESSED U-LINTELS

6 FRECASI & FRESINESSED 0-LIVIELS								
	GRAVITY							
TYPE	sus	8F8-0B	8F12-ØB	8F16-0B	8F2Ø-ØE	8F24-ØB	8F28-ØB	8F32-ØB
LENGTH	BUB	8F8-1B	8FI2-IB	8F16-1B	8F2Ø-1B	8F24-1B	8F28-IB	8F32-1B
2'-10'(34') PRECAST	23@2	3166	4473	6Ø39	7526	9004	1Ø472	11936
2 -10 (34) RECAST	2502	3166	4473	6039	7526	9004	1Ø472	11936
3'-6" (42") PRECAST	23@2	3138	3377	4689	6001	7315	8630	9947
		3166 2325	4473 2496	6Ø39 3467	1526 4438	9004 5410	6384	11936
4'-0" (48") PRECAST	2029	2646	4473	6039	7526	9004	10472	11936
		1787	1913	2657	34@3	4149	4896	5644
4'-6" (54") PRECAST	1651	217@	4@27	6039	7526	9004	1Ø472	9668
		1223	13Ø1	18@9	2317	2826	3336	3846
5'-4" (64") PRECAST	1184	1665	2889	5Ø57	6096	5400	6424	7450
5'-10"(10") PRECAST		1000	1059	1474	1889	23@4	2721	3137
9-10 (10) FRECAST	972	1459	2464	4144	5458	4437	5280	6122
6'-6" (18") PRECAST	937	1255	2101	3263	2746	3358	3971	4585
0 0 (10) 1 20 0	1001	1255	21001	3396	5260	7134	8995	6890
1'-6' (90') PRECAST	767	1029	1675	2385	1994	2439	2886	3333
1-2 (32) 120,01	161	1029	1675	2610	3839	55%	6613	5Ø47
9'-4" (112") PRECAST	573	632	1049	1469	1210	1482	1754	2027
3 / 112 / 1120/101	313	768	1212	1818	2544	3469	4030	3127
10'-6"(126") PRECAST	456	482	8/02	1125	915	1122	1328	1535
11'-4' (136') PRECAST		658 598	1Ø25 935	1514	2 <i>0</i> 81 1854	2355	313@	2404
	445	598	935	1365	1854	2441	3155	4044
		545	864	1254	1689	2014	1570	1818
12'-Ø'(144') PRECAST	414	555	864	1254	1693	2211	2832	3590
		427	726	1028	1331	1635	1224	1418
13'-4" (160") PRECAST	362	485	148	1076	1438	1855	2343	2920
		381	648	919	1190	1462	1087	1260
14'-Ø"(168") PRECAST	338	455	700	1003	1335	1714	2153	2666
14'-8" (176")		NR	NR	NR	NR	NR	NR	NR
PRESTRESSED	N.R.	465	765	1370	2Ø45	2610	3185	3765
15'-4" (184")		NR	NR	NR	NR	NR	NR	NR
PRESTRESSED	N.R.	420	695	1250	1855	2370	2890	3410
17'-4" (2@8")	NR.	NR	NR	NR	NR	NR	NR	NR
PRESTRESSED	INUR.	310	530	95Ø	1400	1800	2200	2600
19'-4" (232")	N.R.	NR	NR	NR	NR	NR	NR	NR
PRESTRESSED		240	400	150	1090	1400	1720	2030
21'-4" (256") PRESTRESSED	N.R.	NR	NR	NR	NR	NR	NR	NR
22'-0" (264')		183	330	610	940	1340	1780	2110
PRESTRESSED	N.R.	NR 16.0	NR 200	NR 576	NR	NR 105.0	NR ICCO	NR 107.0
24'-0' (288')	_	I60 NR	300 NR	57Ø NR	8TØ NR	125Ø	1660 NR	197Ø
PRESTRESSED	N.R.	1360	240	47Ø	T2Ø	1030	135Ø	1610
		שכו	240	410	126	שכשו	שפפו	שושו

8" PRECAST W/ 2" RECESS DOOR U-LINTELS


		GRAVITY						
TYPE		8RF6-0B	8RF10-0B	8RF14-0B	8RF18-0B	8RF22-ØB	8RF26-ØB	8RF30-0E
LENGTH	8RU6	8RF6-1B	8RFIØ-IB	8RF14-1B	8RFI8-IB	8RF22-1B	8RF26-IB	8RF3Ø-1B
4'-4" (52") PRECAST	1489	1591	3Ø53	2982	3954	4929	59Ø4	6880
4-4 (92) - RECAST	1485	1827	3412	4982	6472	1941	9416	10878
4'-6" (54") PRECAST	1357	1449	2782	2714	3600	4487	5375	6264
4-8 (347) NEGAGI	1 661	17@2	3412	4982	6472	1941	9416	10878
5'-8" (68") PRECAST	185	832	1602	1550	2058	2566	3Ø75	3585
9-8 (887FRECASI	100	1153	2162	4074	6472	6516	5814	6839
5'-10' (70') PRECAST	135	err	1500	1449	1924	2400	2876	3352
9 - ID (ID) FRECAST	139	11Ø3	2051	3811	6472	6516	545Ø	6411
6'-8' (80') PRECAST	822	9Ø1	1677	2933	2576	3223	3872	4522
8 -8 (88)T RECACT	622	9Ø7	1677	2933	4100	6730	דדופ	6707
1'-6' (90') PRECAST	665	761	1377	2252	1958	2451	2944	3439
1-6 (36) PRECASI	205	764	דרנו	2329	3609	5492	6624	5132
9'-8' (II6') PRECAST	371	420	834	1253	1071	1342	1614	1886
3 -D (IID) I RECAST	" و	535	928	1497	2179	2618	3595	2875

8' PRECAST & PRESTRESSED U-LINTELS

	UPLIFT						LATE	RAL	
LENGTH TYPE	8F8-1T	8F12-1T 8F12-2T	8F16-1T	8F2Ø-1T 8F2Ø-2T		8F28-1T 8F28-2T	8F32-1T	8U8	8F8
2'-10'(34') PRECAST	2727	2878	4101	5332	6569	IIST	9/055	2@21	2@21
	2121	2184	3981 326Ø	519Ø 4237	64Ø1 5219	163Ø 62Ø4	8851 1192		
3'-6" (42") PRECAST	2165	2215	3165	4125	5@91	6061	7036	1257	1257
4'-0' (48') PRECAST	878	1989	2832	3680	4532	5387	6245	938	938
	878	1925	275Ø	3583	4422	5264	6110	350	938
4'-6" (54") PRECAST	1660	1762	25Ø7	325T 31TI	4010 3913	4767 4658	5525 5406	727	727
	1393	1484	2110	2741	3375	4010	4648	5Ø5	505
5'-4" (64") PRECAST	1393	1437	2050	2670	3293	3920	4549		
5'-10"(10") PRECAST	1272*	1357	1930	25Ø5	3Ø84	3665	4247		418
5 - W C W / PRECASI	1272	1315	1875	2441	3010	3583	4157	418	
6'-6'(18') PRECAST	1141*	1200	1733	225@	2769	3290	3812	רפד	881
1.571145701	1141	1182	1684	2192	27Ø3	3216	3732	101	
1'-6" (90") PRECAST	959+	912	1475	1914	2354	2797	3240	591 454	630
	990	1029	1466	1907	2351	2797	3245		
9'-4" (112") PRECAST	8Ø1*	612 T55	980	1269	1560	1852	2144		
	716+	498	193	10027	1261	1496	1731		493
10'-6"(126") PRECAST	716	611	1039	1389	וורו	2034	2358	396	
	666	439	696	899	1104	13Ø9	1515		
11'-4" (136") PRECAST	666	535	9/25	1295	1595	1896	2198	363	556
	607.	400	631	816	1001	1186	1372		494
12'-0'(144') PRECAST	631	486	818	1209	1514	1799	2086	340	
13'-4" (160") PRECAST	500.	340	532	686	841	997	1153	3@2	398
D-4 (1882 / I NECASI	573	409	682	1004	1367	1637	1897	362	
14'-@"(168") PRECAST	458*	316	493	635	778	922	1065	286	360
	548	378	629	922	1254	1567	1816		
14'-8" (176") PRESTRESSED	243	295	459	591	124	851	99Ø	N.R.	357
15'-4" (184")	243	352 278	582 43Ø	852 553	677	1491 8Ø1	1742 925		
PRESTRESSED	228	329	542	791	10772	1381	1676	N.R.	327
17'-4' (208')	188	236	361	464	567	670	174		255
PRESTRESSED	188	276	449	649	874	1121	1389	N.R.	
19'-4" (232")	165	207	313	401	490	578	667	N.R.	204
PRESTRESSED	165	239	383	550	736	940	1160		
21'-4" (256")	145	186	278	356	433	512	590	N.R.	172
PRESTRESSED	142	212	336	477	635	2Ø1	993		
22'-Ø" (264") PRESTRESSED	140	180	268	343	418	493	568	NB	161
	137	205	322	457	607	771	947	2	101
24'-0' (288') PRESTRESSED	127	165	244	312	38Ø	447	515	N.R.	135
I NESTRESSED	124	186	290	408	538	680	833	4R	

8F8-1B/IT 8F8-ØB/IT 8RF14-1B/IT 8F16-ØB/IT 8F2Ø-1B/IT 8F24-1B/IT

TYPE DESIGNATION

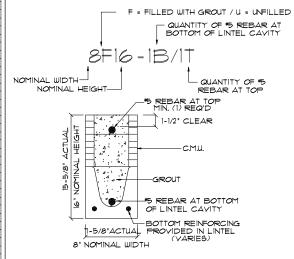

MATERIALS 1. f'c precast lintels = 3500 psi.

- 1. I'c precast lintels = 3500 psi.
 2. I'c prestressed lintels = 6000 psi.
 3. I'c grout = 3000 psi w/ maximum 3/8' aggregate.
 4. Concrete maconry units (CMU) per ASTM C90 w/
 minimum net area compressive strength = 1900 psi.
 5. Rebar provided in precast lintel per ASTM A615
 GR60. Field rebar per ASTM A615 GR40 or GR60.
 6. Prestressing strand per ASTM A416 grade
 270 low relaxation.
 7. 1/32 wire per ASTM C210 type M or S.
 GENERAL NOTES
 1. Provide full mortar head and bed joints.
 2. Shore filled lintels as required.
 3. Installation of lintel must comply with the architectural

- 3. Installation of lintel must comply with the architectural and/or
- structural drawings.
 4. Lintels are manufactured with 5-1/2' long notches at the ends
- to accommodate vertical cell reinforcing and grouting.
 5. All lintels meet or exceed L/360 vertical deflection, except lintels 17-44 and longer with a nominal height of 84 meet or exceed L/180.

 6.Bottom field added rebar to be located at the bottom of
- the lintel cavity.

 1. 1/32' diameter wire stirrups are welded to the bottom steel for mechanical anchorage.

 2. Cast-in-place concrete may be provided in composite lintel

- in lieu of concrete masonry units. 9.5afe load ratings based on rational design analysis per ACI 318 and ACI 530

- SAFE LOAD TABLE NOTES

 I. All values based on minimum 4" bearing. Exception: Safe loads for unfilled lintels must be reduced by 20% if bearing length is less than 6-1/2°. Safe loads for all recessed lintels based on 8" nominal bearing. 2. N.R. = Not Rated.
- 3. Safe loads are total superimposed allowable load on the section specified.
- 5. Safe loads based on grade 40 or grade 60 field rebar.
 5. Additional lateral load capacity can be obtained by the designer by providing additional reinforced masonry above the precast lintel.
- 6. One #7 rebar may be substituted for two #5 rebars in 8" lintels only.
- 7. The designer may evaluate concentrated loads from the safe load tables by calculating the maximum resisting moment and shear at d-away from the face of support.

 8. For composite lintel heights not shown, use safe load from
- next lower height.
 All safe loads in units of pounds per linear foot

All sale loads in units	or pouros per linear root.	
8" PRECAST W/	2" RECESS DOOR U-	LINTELS

	UPLIFT						LATERAL		
TYPE	SRF6-IT	SRF10-IT	8RFI4-IT	SRFIS-IT	8RF22-IT	8RF26-IT	8FF3Ø-11	8RU6	8RF6
LENGTH	8RF6-21	8F4F1Ø-2T	8RF14-2T	8RF18-2T	8F4F22-2T	8RF26-2T	8FF3Ø-2T		
4'-4" (52") PRECAST	1244	1573	2413	3260	4112	4967	5825		932
4-4 (92) FRECASI	1244	1519	2339	3170	4008	4850	5696	932	
4'-6" (54") PRECAST	1192	15ØT	2311	3121	3937	4756	5577		853
4-0 (947)-RECAST	1192	1455	2240	3Ø36	3837	4643	5453	853	
EL AL (CAL) PDEC AGE	924•	1172	1795	2423	3Ø55	3689	4325	501	501
5'-8" (68") PRECAST	924	1132	1741	2357	2978	3603	423@		
5'-10" (70") PRECAST	896+	1138	1742	2352	2965	3581	4198	469	469
5-10 (10 / PRECASI	896	1099	1690	2288	2891	3497	4106		
6'-8' (80') PRECAST	3178	882	1513	2Ø42	2573	31Ø7	3642		1100
8 -8 (80)I-RECASI	375	956	1468	1981	25Ø9	3Ø35	3563	830	
1'-6' (90') PRECAST	688	697	1325	1810	2280	2753	3227	שוד	941
	688	849	13Ø2	1762	2225	2690	3157		
9'-8' (II6') PRECAST	533*	433	808	1123	1413	17Ø4	1995	516	614
5-0 (110 / PRECASI	533	527	1009	1369	1728	2088	2450		
*REDUCE VALUE BY 25% FOR GRADE 40 FIELD REBAR									

CONNECTOR SCHEDULE

CONNECT.	SIMPSON		USP	MAX.	LAT. LDS.	
TYPE	DESCRIPTION	FASTENERS PER CONNECTOR	DESCRIPTION	uPLIFT	F1 / F2	
4	HETA2Ø	14-10d x 11/2"	E†A2Ø	PER CONNECTOR 14-10d	1,810	65 / 960
		•				
5	DETAL20	18-10d x 1½"	N/A	N/A	2,480	2000/137
20	H3	RFT: 4-8d / PLT: 4-8d	RT3	RFT: 4-8d / PLT: 4-8d RFT:5-8dx1½"/PLT:5-8d	455	125 / 160
21	H1	RFT: 6-8dx1 ¹ / ₂ "/PLT: 4-8d RFT: 8-8d x 1 1/2"	RTI5	RFT: 8-8d x 11/2"	475	485 / 165
22	H1Ø5	PLT: 8-8d x 1 1/2"	RTI6	PLT: 8-8d	99Ø	585/525
23	LUS26	HDR: 4-10d/JST: 4-10d RFT / TRS: 4-8d	JUS26	HDR: 4-10d/JST: 4-10d RFT / TRS: 9-10d	935	N/A
24	HT	PLT / STD: 10-8d	RT2Ø	PLT / STD: 13-10d	985	400 / N/
26	H2.5	RFT:5-8d / PLT: 5-8d	RTT	RFT:5-8d / PLT: 5-8d	415	150 / 150
34	A34	H:4-8dx11/2"/P:4-8dx11/2"	MP34	H:4-8dx11/2"/P:4-8dx11/2"	365	280 / 30
35	A35F	H:4-8dx11/2"/P:4-8dx11/2"	MPAIF	$H:6-8dx1^{1/2}$ "/P:6-8dx1 $^{1/2}$ "	440	440 / N/A
37	MTS12	14-10d	MTW12	14-10d	1,000	N/A
38	MTS16	14-10d	MTW16	14-10d	1,000	N/A
39	MTSM16	BLK: (4)1/4"X21/4" T.C. TRUSS: (7) 100d	MTW16	BLK: (4)14"X214" T.C. TRUSS: (7) 10d	860	N/A
43	LSTA12	10-10d	LSTA12	10-10d	905	N/A
45	STIS	14-16d	STIS	14-16d	1,200	N/A
47	LSTA24	18-10d	LSTA24	18-10d	1,295	N/A
71	MSTA36	26-10d	MSTA36	26-10d	2,135	N/A
72	MSTC66	64-16d SINKERS	N/A	N/A	5,495	N/A
er	SPI	STD:6-10d / PLT:4-10d	SPT22	STD:4-10d / PLT:4-10d	535	560 / 26
80	5F2	STD:6-10d / PLT:6-10d	SPT224	STD:6-10d / PLT:6-10d	605	560 / 26
81	SPH4,6,8	12-10d x 11/2"	TP4,6,\$8	12-100d x 11/2"	885	N/A
88	CBSQ88	12 SDS 1/4×2"	TP4,6,48	12-10d x 1½"	3975	N/A
	CB66	(2) % BOLTS	PA8X8	4-10d	2,300	985
90	ABU66	12-16d	PAU66	12-16d	2,240	N/A
91	CBSQ66	14 SDS 1/4×2"	PAU66	12-16d	3,190	N/A
92	ABU44	12-16d	PAU44	12-16d	2,200	N/A
93	AC6 (MAX)	28-16d	PB566	24-16d	1,815	1,070
94	AC4 (MAX)	28-16d	PB\$44	24-16d	1,815	1,070
95	HTS2Ø	20-10d	HTW2Ø	20-10d	1,450	N/A
96	HD8A	91LL: ½" BOLT STUD:(3) ½"X5½" BOLTS	HHD8A	91LL: 1/2" BOLT STUD:(3) 1/2"X51/2" BOLTS		N/A
97	MTT28B	24-16d	MTS27B	24-16d	4,455	N/A
99	A35	H:4-8dx11/2"/P:4-8dx11/2"	MPAI	$H:6-8dx1^{1/2}$ "/P:6-8dx1 $^{1/2}$ "	44Ø	440 / N/
101	HTT4	5%" BOLT/ 18-16d×2½"	N/A	N/A	3,640	N/A
1002	HTT5	%" BOLT/ 26-10d	N/A	N/A	4,275	N/A
103	VGTR/L	32-SDS¼"×3"/(2) %" BLT	N/A	N/A	3,990	N/A
104	HDU8-SDS2.5	7/8" BLT/2Ø-SDS ¼"x2½"	N/A	N/A	5,020	N/A
110	HCP2	12-10d x 1½"	HHCP2	20-10d x 1½"	520	260 / N/
167	HHUS46	H:14-16d/J:6-16d	THD46	H:8-18d/J:12-10d	1,550	N/A
168	U46	H:8-10d/J:4-10d	SUH46	H:8-16d/J:4-16d	710	N/A
181	HUS26	20-16d	THD26	H:20-16d/J:10-10d	1,550	N/A
184	HUC28-2	H:14-16d/J:4-10d	N/A	N/A	1,085	N/A
212	HUC410	HD:18-1/2 "X13/4" LAG SCR. BM: 10-10d	N/A	N/A	1,810	N/A
21.4	1110 420	BLOCK: 10-1/4"×11/2" TC	1,110,410	BLOCK: 10-1/4"×11/2" TC	100-	31/4
214	HUC412	JOIST : 10-16d	HUS412	JOIST : 10-16d	1,895	N/A
215	HGUS21Ø-2	HDR:46-16d/JST:10-16d	EHUH21Ø-2	HDR:40-16d/JST:16-10d	2,720	N/A
216	HUC\$412	BLOCK: 10-14"X11/2" TC JOIST : 10-16d	HUS412	BLOCK: 10-14"X11/2" TC JOIST : 10-16d	3,240	N/A
217	HUS212-2	BLOCK: 10-1/4"X11/2" TC JOIST : 10-16d	HUS212-2	BLOCK: 10-1/4"X11/2" TC JOIST : 10-16d	2,630	N/A
219	MBHA412	H:1-ATR34X8 TOP4FACE JOIST: 18-10d	NFM35×12U	H:1-1/2" J-BOLT J:5-1/2" BOLT6	3,145	N/A
220	N/A	N/A	NFM 3×12	BLK:1/2 " + J /JST:14-10d	1,620	N/A
226	MBHA4.75/12	$HDR: (2)^{3}/_{4}$ " $\phi \times 8$ "	NFM45U	HDR : MIN. 1/2 " + "J" BOLT	2,160	N/A
231	MBHA3.56/16	JOIST : 18-10d HDR : (2) ³ 4"\$ × 8"	NFM3.5×16U	JOIST : (5) 1/2 4 BOLTS HDR :MIN. 1/2 4xJ-BOLTS	3,450	N/A
		JOIST : 18-10d HDR : (2) ³ / ₄ "\$ × 8"		JOIST : (5) $\frac{1}{2}$ + BOLTS HDR :MIN. $\frac{1}{2}$ +xJ-BOLTS		
232	MBHA5.50/16	JOIST : 18-10d	NFM5.5×16U	JOIST : (5) 1/2 " # BOLTS	3,450	N/A
240		R:4-10dx11/2"/P:4-10dx11/2"	N/A	N/A	1,300	480 / N/
241	LGT2	30-16d-sinker	LUGT2	32-10d	2000	1015 / 44
3Ø1	MGT	(1) ³ 4 "BLTS./GIR: 22-10d	N/A	N/A	3,965	N/A
3Ø2	HGT-2 or 3	LTL:34 BLTS./GIR: 8-10d	USC63	LTL:3/4 'BLTS./GIR: 8-16d	6485	N/A
3Ø3	HGT-4	LTL:34	N/A	N/.A	9,250	N/A
	FGTR (2-PLY)	TRUSS: 36 SDS 1/2 "X3"	N/A	N/A	9,400	N/A
3Ø5	1 411 (2-1 11)	WALL:(4)1/2"X5" TITEN HD				
3Ø5 4Ø1	SUR/L414	WALL:(4)½"X5" TITEN HD FACE:18-16d/JST:8-16d	N/A	N/A	1,700	N/A

REVISIONS BY

 \triangleleft \Diamond EL DATA Ī PRE CAST LINTE STRUCTURAL I

SERIES

AMAZE THRIVE 1335

DATE Ø6-Ø1-22 SCALE AS NOTED

RDC DRAWN 1335

JOB SHEET SHEETS

